


STANDARD RANGE

optibelt **VB** CLASSIC V-BELTS

DIN 2215 / ISO 4184

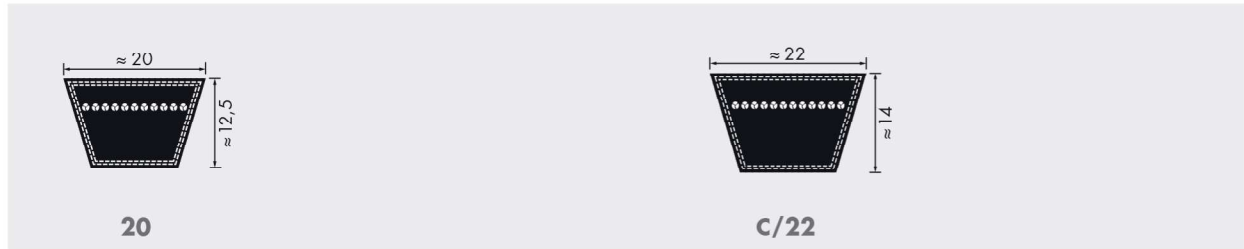

| Profile 20 | | | Profile C/22 | | | | | | | |
|--------------------------------|-----------------------------|---------------------|--------------------------------|-----------------------------|---------------------|--------------------------------|-----------------------------|----------|--------------------------------|-----------------------------|
| Datum length ISO L_d [mm] | Inside length L_i [mm] | Belt no. | Datum length ISO L_d [mm] | Inside length L_i [mm] | Belt no. | Datum length ISO L_d [mm] | Inside length L_i [mm] | Belt no. | Datum length ISO L_d [mm] | Inside length L_i [mm] |
| 950 | 900 | C 43 | 1148 | 1090 | C 84 | 2192 | 2134 | C 134 | 3462 | 3404 |
| 1050 | 1000 | C 47 | 1258 | 1200 | C 85 | 2217 | 2159 | C 136 | 3508 | 3450 |
| 1170 | 1120 | C 48 | 1273 | 1215 | C 86 | 2242 | 2184 | C 138 | 3563 | 3505 |
| 1230 | 1180 | C 49 | 1308 | 1250 | C 87 | 2268 | 2210 | C 140 | 3608 | 3550 |
| 1300 | 1250 | C 51 | 1353 | 1295 | C 88 | 2298 | 2240 | C 142 | 3665 | 3607 |
| 1370 | 1320 | C 52 | 1378 | 1320 | C 89 | 2319 | 2261 | C 144 | 3716 | 3658 |
| 1450 | 1400 | C 53 | 1408 | 1350 | C 90 | 2344 | 2286 | C 146 | 3758 | 3700 |
| 1550 | 1500 | C 54 | 1433 | 1375 | C 92 | 2395 | 2337 | C 148 | 3808 | 3750 |
| 1650 | 1600 | C 55 | 1458 | 1400 | C 93 | 2418 | 2360 | C 150 | 3868 | 3810 |
| 1750 | 1700 | C 56 | 1483 | 1425 | C 94 | 2446 | 2388 | C 158 | 4058 | 4000 |
| 1850 | 1800 | C 57 | 1508 | 1450 | C 95 | 2471 | 2413 | C 162 | 4158 | 4100 |
| 1950 | 1900 | C 58 | 1533 | 1475 | C 96 | 2496 | 2438 | C 166 | 4274 | 4216 |
| 2050 | 2000 | C 59 | 1558 | 1500 | C 96 ^{1/2} | 2508 | 2450 | C 167 | 4308 | 4250 |
| 2170 | 2120 | C 60 | 1582 | 1524 | C 97 | 2522 | 2464 | C 168 | 4325 | 4267 |
| 2290 | 2240 | C 61 | 1608 | 1550 | C 98 | 2558 | 2500 | C 170 | 4376 | 4318 |
| 2410 | 2360 | C 62 | 1632 | 1574 | C 99 | 2583 | 2525 | C 173 | 4452 | 4394 |
| 2550 | 2500 | C 63 | 1658 | 1600 | C 100 | 2598 | 2540 | C 175 | 4503 | 4445 |
| 2700 | 2650 | C 65 | 1708 | 1650 | C 101 | 2618 | 2560 | C 177 | 4558 | 4500 |
| 2850 | 2800 | C 66 | 1734 | 1676 | C 102 | 2649 | 2591 | C 180 | 4630 | 4572 |
| 3050 | 3000 | C 67 | 1758 | 1700 | C 104 | 2700 | 2642 | C 187 | 4808 | 4750 |
| 3200 | 3150 | C 68 | 1785 | 1727 | C 105 | 2725 | 2667 | C 190 | 4884 | 4826 |
| 3400 | 3350 | C 69 | 1808 | 1750 | C 106 | 2750 | 2692 | C 195 | 5011 | 4953 |
| 3600 | 3550 | C 70 | 1836 | 1778 | C 108 | 2808 | 2750 | C 197 | 5058 | 5000 |
| 3800 | 3750 | C 71 | 1858 | 1800 | C 110 | 2858 | 2800 | C 208 | 5358 | 5300 |
| 4050 | 4000 | C 72 | 1887 | 1829 | C 112 | 2903 | 2845 | C 210 | 5392 | 5334 |
| 4550 | 4500 | C 73 | 1912 | 1854 | C 114 | 2954 | 2896 | C 220 | 5658 | 5600 |
| 5050 | 5000 | C 74 | 1938 | 1880 | C 115 | 2979 | 2921 | C 225 | 5773 | 5715 |
| 6050 | 6000 | C 75 | 1958 | 1900 | C 116 | 3008 | 2950 | C 236 | 6058 | 6000 |
| | | C 76 | 1988 | 1930 | C 117 | 3023 | 2965 | C 240 | 6154 | 6096 |
| | | C 77 | 2014 | 1956 | C 118 | 3058 | 3000 | C 248 | 6358 | 6300 |
| | | C 78 | 2039 | 1981 | C 120 | 3106 | 3048 | C 264 | 6758 | 6700 |
| | | C 79 | 2058 | 2000 | C 122 | 3157 | 3099 | C 270 | 6916 | 6858 |
| | | C 80 | 2090 | 2032 | C 124 | 3208 | 3150 | C 280 | 7158 | 7100 |
| | | C 81 | 2118 | 2060 | C 126 | 3258 | 3200 | C 295 | 7558 | 7500 |
| | | C 82 | 2141 | 2083 | C 128 | 3308 | 3250 | C 300 | 7678 | 7620 |
| | | C 83 | 2166 | 2108 | C 130 | 3360 | 3302 | C 315 | 8058 | 8000 |
| | | C 83 ^{1/2} | 2178 | 2120 | C 132 | 3408 | 3350 | | | |

| | |
|---|--|
| Maximum production length: 10 000 mm L_i Minimum order quantity: Over 1800 mm = 18 pieces for non-standard length ranges 54 pieces for special constructions Weight: ≈ 0.266 kg/m | Maximum standard production length: 21 000 mm L_i Over 18 000 to 21 000 mm on request Minimum order quantity: Over 1800 mm = 16 pieces for non-standard length ranges 48 pieces for special constructions Weight: ≈ 0.324 kg/m |
|---|--|

Datum length $L_d \pm$ Pitch length L_w/L_p Further sizes on request

Lengths in **bold** type are in S=C Plus (SetConstant).