
MV300/3M

Single phase-2poles-3000RPM-50HZ
230 Voltage

Mechanical Features		
General		
Working moment	**6.4**	kg.cm
Unblance	**3.2**	kg.cm
Force	**321**	kg
Bearing		
TYPE	**6303**	
	100%	**2650**
Life(h)	80%	**4520**
	50%	**20582**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features	
General	
Nominal voltage	**230V**
Input power	**0.27KW**
Current A max	**1.58A**
Power factor	**0.74**
La/in	**3.8**
Certification	
ETL CLASS II DIV.II	**T4**
GROUP F G TENV NEMA 4	
ATEX II 3D Ex tD A22	**T100°**
IP66	
Amb Temp.	**(-20°~+40°)**

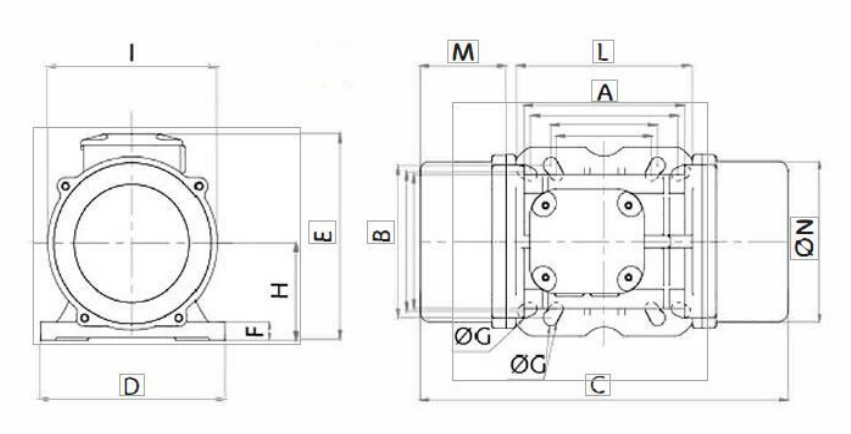

A	90
B	125
C	253
M	45
G	13
Holes	4
D	154
E	175
F	15
H	79
I	142
L	163
N	131

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
9.9	M12	13X24	4GX2.5	M20X1.5