
MV60/3M

Single phase-2poles-3000RPM-50HZ
230 Voltage

Mechanical Features			Electric Features	
General			**General**	
Working moment	**1.31**	kg.cm	Nominal voltage	**230V**
Unblance	**0.66**	kg.cm	Input power	**0.08KW**
Force	**66**	kg	Current A max	**0.43A**
Bearing			Power factor 0.81	
TYPE	**6202**		La/in 3.2	
	100%	**86585**	**Certification**	
Life(h)	80%	**>100000**	ETL CLASS II DIV.II	**T4**
	50%	**>100000**	GROUP F G TENV NEMA 4	
Bearing Grease				
Lube Schedule			IP65	
Lube replacement			Amb Temp. **(-20°~+40°)**	
Grease Type				

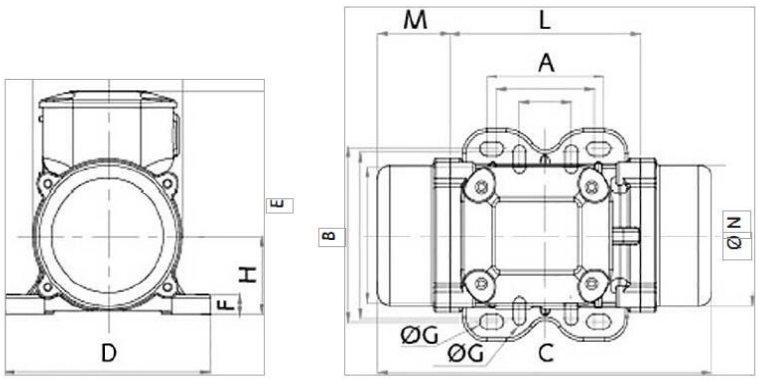

A	62-74
B	106
C	211
M	45
G	9
Holes	4
D	130
E	136
F	12
H	48
I	94
L	121
N	85

Clamping torque(Nm)	23

weight	Screw	washer	Cable type	Cable Glande
4.7	M8	8.4X16	4GX1.5	M16X1.5