
MV10000/15

Three phase-4poles-1500RPM-50HZ
400 Voltage

Mechanical Features		
General		
Working moment	**800.11**	kg.cm
Unblance	**400.06**	kg.cm
Force	**10052**	kg
Bearing		
TYPE	**NJ2317**	
	100%	**7664**
Life(h)	80%	**16126**
	50%	**77254**
Bearing Grease		
Lube Schedule	90g	
Lube replacement	180g	
Grease Type	SKF LGHP 2	

Electric Features	
General	
Nominal voltage	**Δ:400V**
Input power	**7.8KW**
Current A max	**14.4A**
Power factor	**0.76**
La/in	6.5
Certification	
ETL CLASS II DIV.II	**T4**
GROUP F G TENV NEMA 4	
IP65	
Amb Temp.	**(-20°~+40°)**

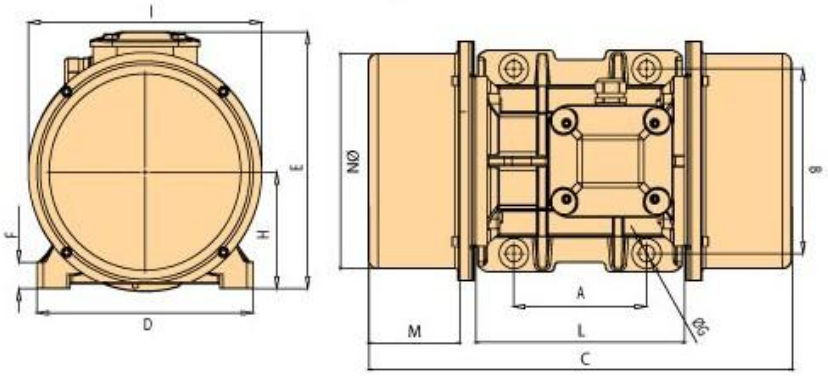

A	125
B	380
C	747
M	170
G	39
Holes	6
D	446
E	415
F	42
H	206
I	400
L	405
N	378

Clamping torque(Nm)	1864

n.weight	Screw	washer	Cable type	Cable Glande
329	M36	37X66	4GX6	M32X1.5

