
MV1100/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**88.67**	kg.cm
Unblance	**44.34**	kg.cm
Force	**1114**	kg
Bearing		
TYPE	**NJ306**	
Life(h)	100%	**10575**
	80%	**24458**
	50%	**>100000**
Bearing Grease		
Lube Schedule	7g	
Lube replacement	14g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.65KW**	
Current A max	**Δ:2.43A**	**Y:1.4A**
Power factor	**0.63**	
La/in	3.8	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
ATEX II 3D Ex tD A22	**T135°**	
IP66		
Amb Temp.	**(-20°~+40°)**	

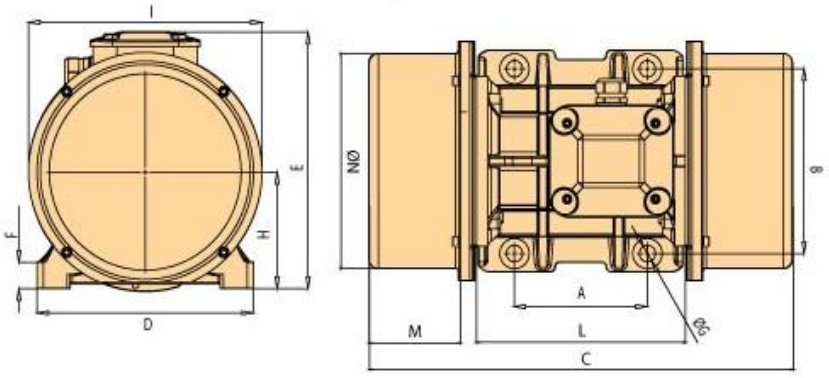

A	120
B	170
C	451
M	123
G	17
Holes	4
D	208
E	210
F	22
H	94
I	180
L	205
N	170

Clamping torque(Nm)	185

n.weight	Screw	washer	Cable type	Cable Glande
36.5	M16	17X30	4GX2.5	M20X1.5

