
MV1400/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features			Electric Features		
General			**General**		
Working moment	**108.57**	kg.cm	Nominal voltage	**Δ:230V**	**Y:400V**
Unblance	**54.28**	kg.cm	Input power	**0.9KW**	
Force	**1427**	kg	Current A max	**Δ:3.08A**	**Y:1.78A**
Bearing			Power factor	**0.72**	
TYPE	**NJ2308**		La/in	4	
	100%	**49235**	**Certification**		
Life(h)	80%	**>100000**	ETL CLASS II DIV.II	**T4**	
	50%	**>100000**	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule	15g		ATEX II 3D Ex tD A22	**T135°**	
Lube replacement	30g		IP65		
Grease Type	SKF LGHP 2		Amb Temp.	**(-20°~+40°)**	

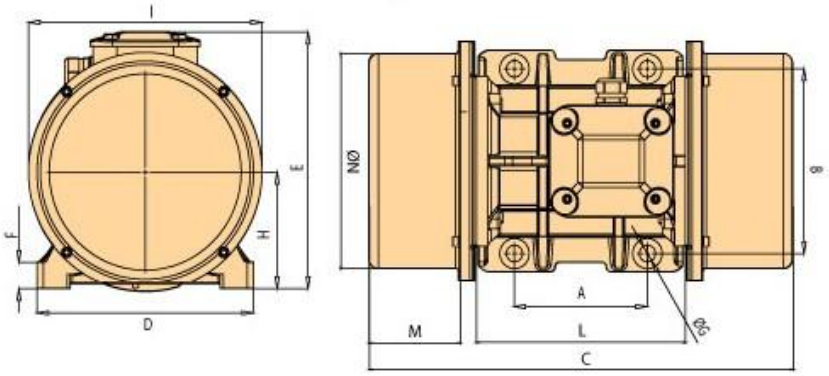

A	140
B	190
C	444.5
M	110
G	17
Holes	4
D	230
E	262
F	30
H	120
I	237
L	220
N	222

Clamping torque(Nm)	185

n.weight	Screw	washer	Cable type	Cable Glande
60.5	M16	17X30	4GX2.5	M20X1.5

