
MV1700/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**137.31**	kg.cm
Unblance	**68.66**	kg.cm
Force	**1733**	kg
Bearing		
TYPE	**NJ2308**	
Life(h)	100%	**34612**
	80%	**72822**
	50%	**>100000**
Bearing Grease		
Lube Schedule	15g	
Lube replacement	30g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**1.15KW**	
Current A max	**Δ:3.63A**	**Y:2.09A**
Power factor	**0.71**	
La/in	4.7	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp.	**(-20°~+40°)**	

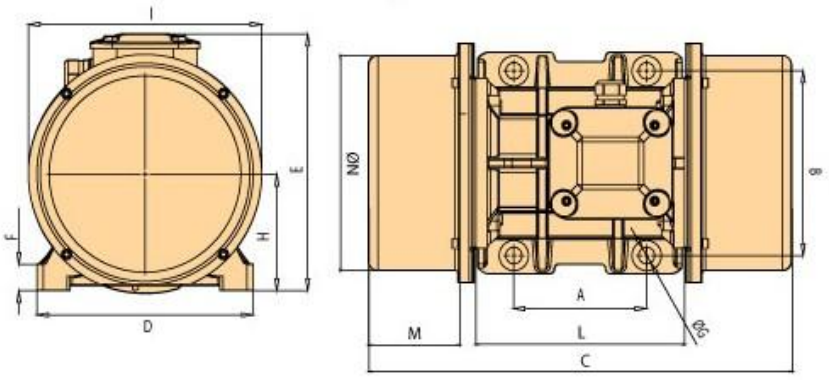

A	140
B	190
C	464
M	120
G	17
Holes	4
D	230
E	262
F	30
H	122
I	237
L	220
N	222

Clamping torque(Nm)	185

n.weight	Screw	washer	Cable type	Cable Glande
62.5	M16	17X30	4GX2.5	M20X1.5

