
MV2400/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**187.69**	kg.cm
Unblance	**93.84**	kg.cm
Force	**2446**	kg
Bearing		
TYPE	**NJ2308**	
Life(h)	100%	**12209**
	80%	**25688**
	50%	**>100000**
Bearing Grease		
Lube Schedule	15g	
Lube replacement	30g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**1.6KW**	
Current A max	**Δ:5.56A**	**Y:3.2A**
Power factor	**0.75**	
La/in	4.9	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP66		
Amb Temp.	**(-20°~+40°)**	

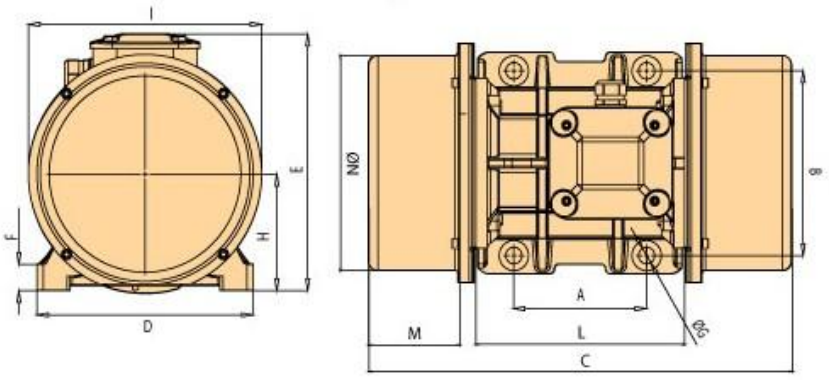

A	140
B	190
C	514
M	145
G	17
Holes	4
D	230
E	262
F	30
H	120
I	237
L	220
N	222

Clamping torque(Nm)	185

n.weight	Screw	washer	Cable type	Cable Glande
68	M16	17X30	4GX4	M25X1.5

