
MV2500/15

Three phase-4poles-1500RPM-50HZ
220/380 Voltage

Mechanical Features		
General		
Working moment	**203.53**	kg.cm
Unblance	**101.76**	kg.cm
Force	**2557**	kg
Bearing		
TYPE	**NJ2311**	
Life(h)	100%	**38420**
	80%	**78952**
	50%	**>100000**
Bearing Grease		
Lube Schedule	26g	
Lube replacement	52g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:220V**	**Y:400V**
Input power	**1.8KW**	
Current A max	**Y:3.4A**	
Power factor	**0.8**	
La/in	6	
Certification		
CE	**EAC**	
IP65		
Amb Temp.	**(-20°~+40°)**	

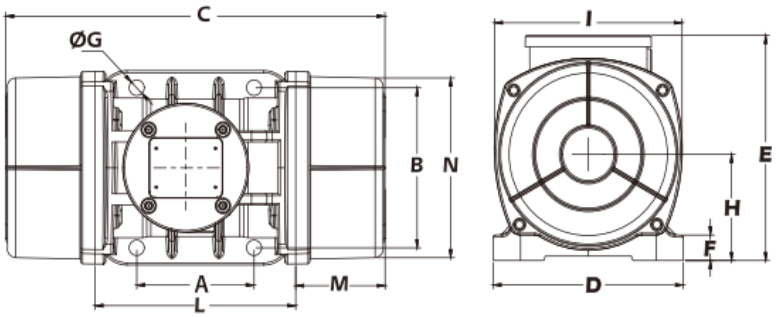

A	155
B	225
C	558.5
M	140
G	25
Holes	4
D	302
E	318
F	34
H	148.5
I	281
L	278.5
N	264

Clamping torque(Nm)	373

n.weight	Screw	washer	Cable type	Cable Glande
97.5	M20	21X37	4GX4	M25X1.5

