
MV300/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**26.58**	kg.cm
Unblance	**13.29**	kg.cm
Force	**326**	kg
Bearing		
TYPE	**6303**	
	100%	**6935**
Life(h)	80%	**12833**
	50%	**41247**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.20KW**	
Current A max	**Δ:1.08**	**Y:0.62A**
Power factor	**0.4**	
La/in	2	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP66		
Amb Temp.	**(-20°~+40°)**	

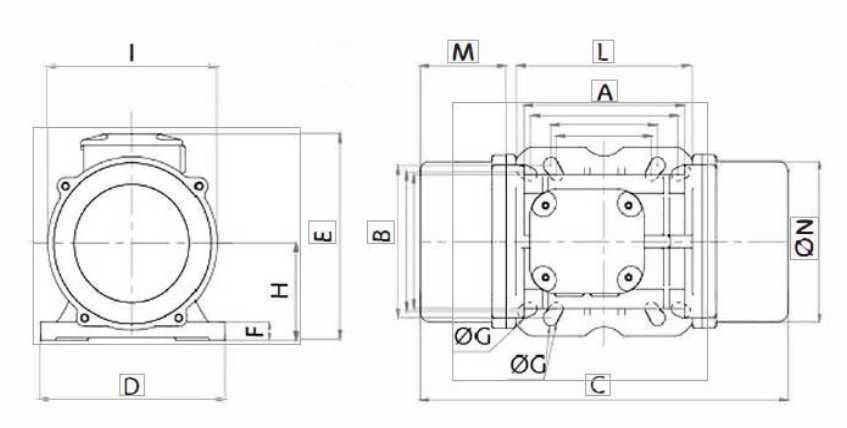

A	90
B	125
C	303
M	70
G	13
Holes	4
D	154
E	175
F	15
H	79
I	142
L	163
N	131

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
13.8	M12	13X24	4GX2.5	M20X1.5

