
MV3000/15

Three phase-4poles-1500RPM-50HZ
220/380 Voltage

Mechanical Features		
General		
Working moment	**248.66**	kg.cm
Unblance	**124.33**	kg.cm
Force	**3058**	kg
Bearing		
TYPE	**NJ2311**	
Life(h)	100%	**23154**
	80%	**51720**
	50%	**>100000**
Bearing Grease		
Lube Schedule	26g	
Lube replacement	52g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:220V**	**Y:400V**
Input power	**1.9KW**	
Current A max	**Y:3.7A**	
Power factor	**0.7**	
La/in	6.5	
Certification		
CE	**EAC**	
IP65		
Amb Temp. **(-20°~+40°)**		

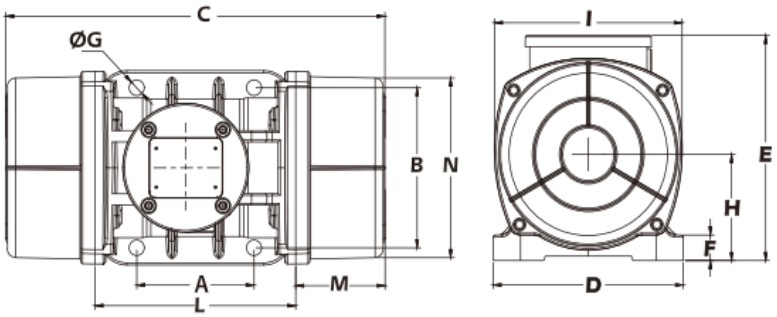

A	155
B	225
C	558.5
M	140
G	25
Holes	4
D	302
E	318
F	34
H	148.5
I	281
L	278.5
N	264

Clamping torque(Nm)	373

n.weight	Screw	washer	Cable type	Cable Glande
110	M20	21X37	4GX4	M25X1.5