
# MV3800/15

## Three phase-4poles-1500RPM-50HZ
## 220/380 Voltage

| Mechanical Features | | |
|---|---|---|
| **General** | | |
| Working moment | **306.69** | kg.cm |
| Unblance | **153.34** | kg.cm |
| Force | **3853** | kg |
| **Bearing** | | |
| TYPE(FAG/SKF) | **NJ2311** | |
| Life(h) | 100% | **19842** |
| | 80% | **41747** |
| | 50% | **>100000** |
| **Bearing Grease** | | |
| Lube Schedule | 26g | |
| Lube replacement | 52g | |
| Grease Type | SKF LGHP 2 | |

| Electric Features | | |
|---|---|---|
| **General** | | |
| Nominal voltage | **Δ:220V** | **Y:400V** |
| Input power | **2.2KW** | |
| Current A max | **Y:4.15A** | |
| Power factor | **0.75** | |
| La/in | 6.8 | |
| **Certification** | | |
| CE | **EAC** | |
| IP65 | | |
| Amb Temp. **(-20°~+40°)** | | |

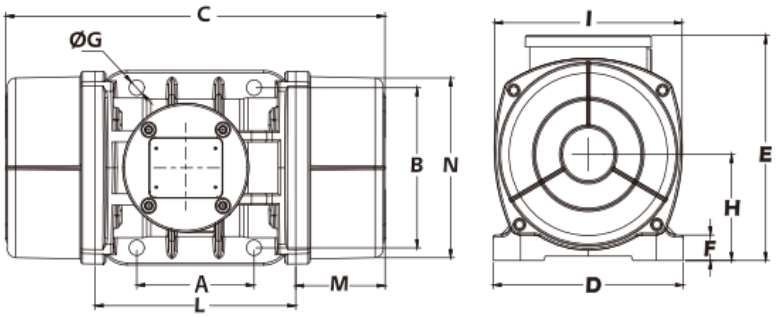


| | |
|---|---|
| A | 155 |
| B | 255 |
| C | 588.5 |
| M | 155 |
| G | 25 |
| Holes | 4 |
| D | 302 |
| E | 318 |
| F | 34 |
| H | 148.5 |
| I | 281 |
| L | 278.5 |
| N | 264 |

| Clamping torque(Nm) | 550 |
|---|---|

| n.weight | Screw | washer | Cable type | Cable Glande |
|---|---|---|---|---|
| 130 | M22 | 22X39 | 4GX6 | M32X1.5 |