

MV40/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features			Electric Features		
General			**General**		
Working moment	**1.97**	kg.cm	Nominal voltage	**Δ:230V**	**Y:400V**
Unblance	**0.98**	kg.cm	Input power	**0.04KW**	
Force	**31**	kg	Current A max	**Δ:0.45**	**Y:0.26A**
Bearing			Power factor 0.45		
TYPE	**6202**		La/in	**2**	
	100%	**>100000**	**Certification**		
Life(h)	80%	**>100000**	ETL CLASS II DIV.II	**T4**	
	50%	**>100000**	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule			IP65		
Lube replacement			Amb Temp. **(-20°~+40°)**		
Grease Type					



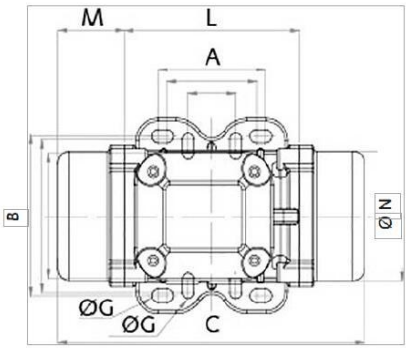

A	62-74 33
B	106 82-102
C	211
M	45
G	9 7 4
Holes	4
D	130
E	136
F	12
H	48
I	94
L	121
N	85

Clamping torque(Nm)	23 9

weight	Screw	washer	Cable type	Cable Glande
4.6	M8 M6	8.4X16 6.4X12	4GX1.5	M16X1.5