

MV400/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**33.43**	kg.cm
Unblance	**16.72**	kg.cm
Force	**420**	kg
Bearing		
TYPE	**6306**	
Life(h)	100%	**12751**
	80%	**24905**
	50%	**92586**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.3KW**	
Current A max	**Δ:1.46A**	**Y:0.84A**
Power factor	0.46	
La/in	2.7	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp.	**(-20°~+40°)**	

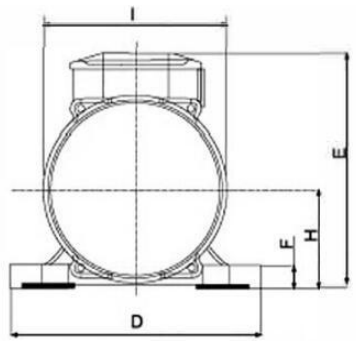

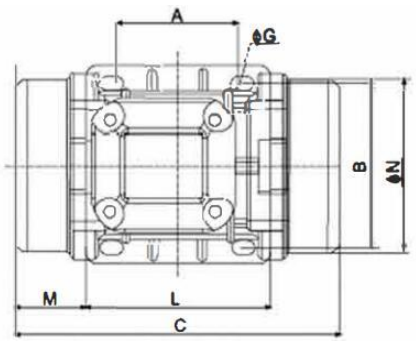

A	105
B	140
C	330
M	78
G	13
Holes	4
D	170
E	196
F	20
H	92
I	168
L	174
N	160

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
19.6	M12	13X24	4GX2.5	M20X1.5

