
MV4300/15

Three phase-4poles-1500RPM-50HZ
220/380 Voltage

Mechanical Features		
General		
Working moment	**343.22**	kg.cm
Unblance	**171.61**	kg.cm
Force	**4312**	kg
Bearing		
TYPE(FAG/SKF)	**NJ2311**	
Life(h)	100%	**13635**
	80%	**28687**
	50%	**>100000**
Bearing Grease		
Lube Schedule	26g	
Lube replacement	52g	
Grease Type	SKF LGHP 2	

Electric Features		
General		
Nominal voltage	**Δ:220V**	**Y:400V**
Input power	**2.5KW**	
Current A max	**Y:4.5A**	
Power factor	**0.72**	
La/in	7	
Certification		
CE	**EAC**	
IP65		
Amb Temp. **(-20°~+40°)**		

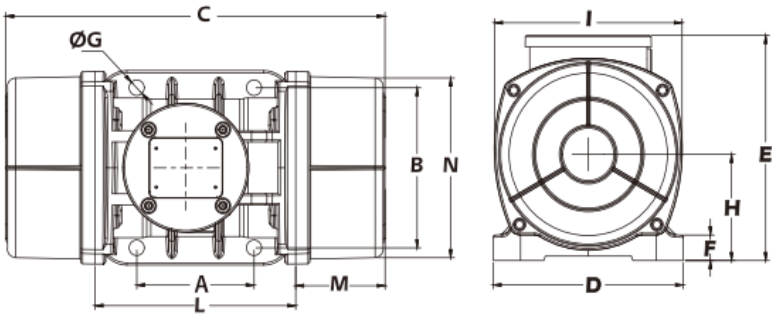

A	155
B	255
C	602.5
M	162
G	25
Holes	4
D	302
E	318
F	34
H	148.5
I	281
L	278.5
N	264

Clamping torque(Nm)	550

n.weight	Screw	washer	Cable type	Cable Glande
145	M22	22X39	4GX6	M32X1.5