
MV500/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**40.12**	kg.cm
Unblance	**20.06**	kg.cm
Force	**504**	kg
Bearing		
TYPE	**6306**	
	100%	**7378**
Life(h)	80%	**14412**
	50%	**59034**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.35KW**	
Current A max	**Δ:1.84A**	**Y:1.06A**
Power factor	0.61	
La/in	2.8	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp.	**(-20°~+40°)**	

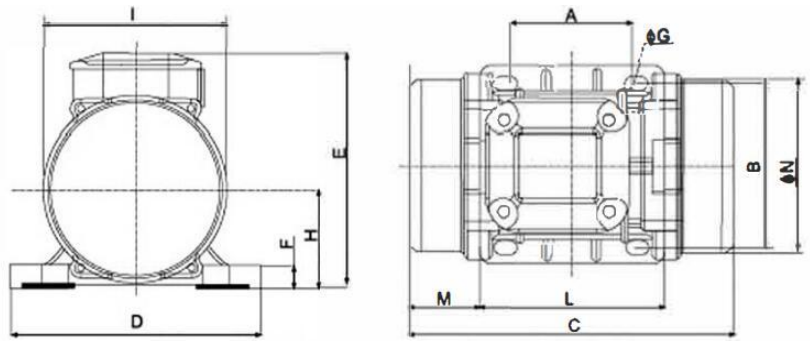

A	105
B	140
C	334
M	78
G	13
Holes	4
D	168
E	196
F	22
H	92
I	169
L	178
N	158

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
21	M12	13X24	4GX2.5	M20X1.5

