
MV700/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**56.83**	kg.cm
Unblance	**28.42**	kg.cm
Force	**714**	kg
Bearing		
TYPE	**6306**	
	100%	**3063**
Life(h)	80%	**5982**
	50%	**24502**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.62KW**	
Current A max	**Δ:2.3A**	**Y:1.32A**
Power factor	**0.83**	
La/in	3	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp.	**(-20°~+40°)**	

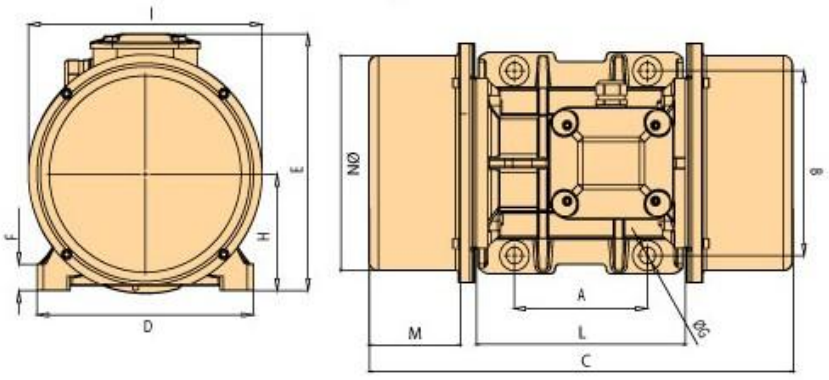

A	120
B	170
C	391
M	93
G	17
Holes	4
D	208
E	210
F	22
H	94
I	180
L	205
N	170

Clamping torque(Nm)	185

n.weight	Screw	washer	Cable type	Cable Glande
28.2	M16	17X30	4GX2.5	M20X1.5

