
MV7200/15

Three phase-4poles-1500RPM-50HZ
400 Voltage

Mechanical Features			Electric Features	
General			**General**	
Working moment	**576.76**	kg.cm	Nominal voltage	**Δ:400V**
Unblance	**288.38**	kg.cm	Input power	**5KW**
Force	**7246**	kg	Current A max	**8.5A**
Bearing			Power factor	**0.76**
TYPE	**NJ2316**		La/in	6.8
	100%	**18291**	**Certification**	
Life(h)	80%	**36839**	ETL CLASS II DIV.II	**T4**
	50%	**>100000**	GROUP F G TENV NEMA 4	
Bearing Grease				
Lube Schedule		65g	IP65	
Lube replacement		130g	Amb Temp.	**(-20°~+40°)**
Grease Type		SKF LGHP 2		

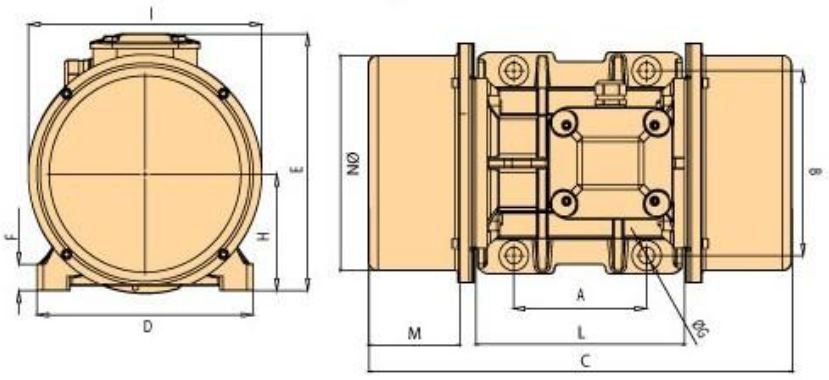

A	200
B	320
C	629.5
M	130
G	28
Holes	4
D	388
E	402
F	42
H	206
I	400
L	369
N	378

Clamping torque(Nm)	873

n.weight	Screw	washer	Cable type	Cable Glande
253	M27	28X50	4GX6	M32X1.5

