
MV90/15

Three phase-4poles-1500RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**5.97**	kg.cm
Unblance	**2.98**	kg.cm
Force	**92**	kg
Bearing		
TYPE	**6302 2Z**	
Life(h)	100%	**>100000**
	80%	**>100000**
	50%	**>100000**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.12KW**	
Current A max	**Δ:0.52A**	**Y:0.31A**
Power factor	**0.5**	
La/in	**2.4**	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp. **(-20°~+40°)**		

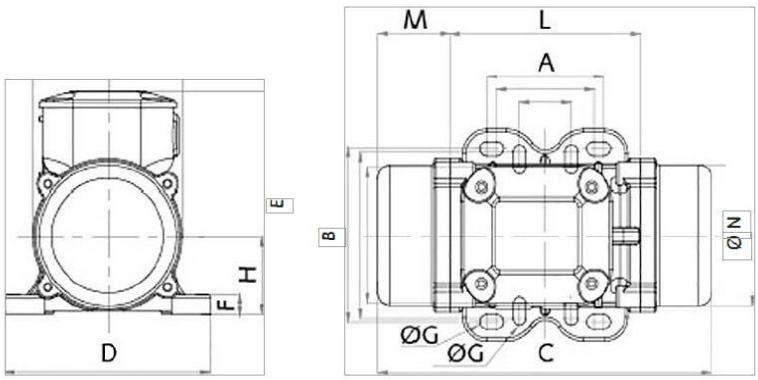

A	62-74
B	106
C	231
M	54
G	9
Holes	4
D	131
E	159
F	15
H	64
I	121
L	123
N	112

Clamping torque(Nm)	23

weight	Screw	washer	Cable type	Cable Glande
6.8	M8	8.4X16	4GX2.5	M20X1.5

