
MV100/1

Three phase-6poles-1000RPM-50HZ
230/400 Voltage

Mechanical Features			Electric Features		
General			**General**		
Working moment	**18.8**	kg.cm	Nominal voltage	**Δ:230V**	**Y:400V**
Unblance	**9.4**	kg.cm	Input power	**0.12KW**	
Force	**105**	kg	Current A max	**Δ:0.7**	**Y:0.42A**
Bearing			Power factor	**0.32**	
TYPE	**6303**		La/in	**2**	
	100%	**>100000**	**Certification**		
Life(h)	80%	**>100000**	ETL CLASS II DIV.II	**T4**	
	50%	**>100000**	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule			IP66		
Lube replacement			Amb Temp. **(-20°~+40°)**		
Grease Type					

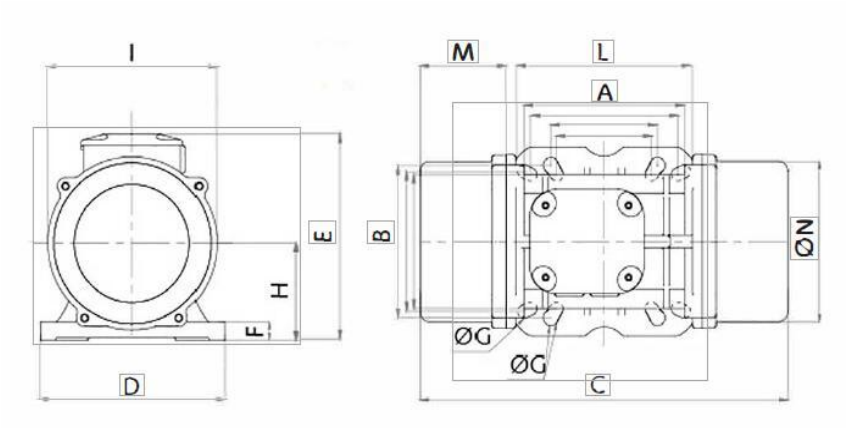

A	90
B	125
C	303
M	70
G	13
Holes	4
D	154
E	175
F	15
H	79
I	142
L	163
N	131

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
13.8	M12	13X24	4GX2.5	M20X1.5

