
MV10000/1

Three phase-6poles-1000RPM-50HZ
400 Voltage

Mechanical Features		
General		
Working moment	**1788.44**	kg.cm
Unblance	**894.22**	kg.cm
Force	**10194**	kg
Bearing		
TYPE	**NJ2317**	
	100%	**10520**
Life(h)	80%	**22578**
	50%	**95852**
Bearing Grease		
Lube Schedule	90g	
Lube replacement	180g	
Grease Type	SKF LGHP 2	

Electric Features	
General	
Nominal voltage	**Δ:400V**
Input power	**7.6KW**
Current A max	**13.5A**
Power factor	**0.64**
La/in	6.5
Certification	
ETL CLASS II DIV.II	**T4**
GROUP F G TENV NEMA 4	
IP65	
Amb Temp. **(-20°~+40°)**	

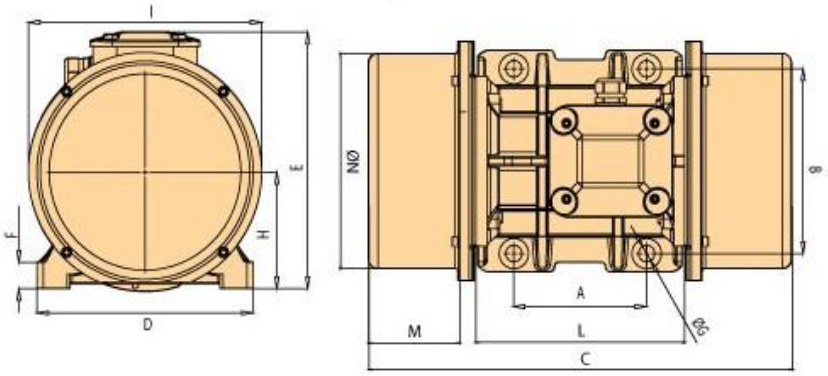

A	125
B	380
C	925.5
M	260
G	39
Holes	6
D	446
E	415
F	42
H	206
I	400
L	405
N	378

Clamping torque(Nm)	1864

n.weight	Screw	washer	Cable type	Cable Glande
386	M36	37X66	4GX6	M32X1.5