

MV200/1

Three phase-6poles-1000RPM-50HZ
230/400 Voltage

Mechanical Features		
General		
Working moment	**33.49**	kg.cm
Unblance	**16.74**	kg.cm
Force	**230**	kg
Bearing		
TYPE	**6306**	
Life(h)	100%	**>100000**
	80%	**>100000**
	50%	**>100000**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features		
General		
Nominal voltage	**Δ:230V**	**Y:400V**
Input power	**0.18KW**	
Current A max	**Δ:0.83A**	**Y:0.48A**
Power factor	0.84	
La/in	4	
Certification		
ETL CLASS II DIV.II	**T4**	
GROUP F G TENV NEMA 4		
IP65		
Amb Temp.	**(-20°~+40°)**	

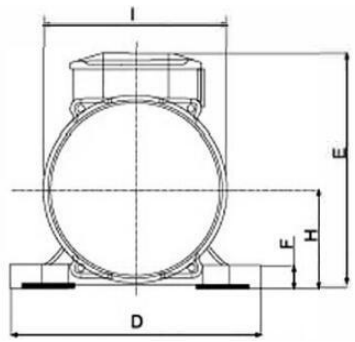

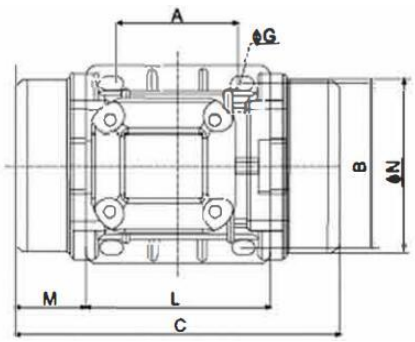

A	105
B	140
C	334
M	78
G	13
Holes	4
D	168
E	196
F	22
H	92
I	169
L	178
N	158

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
21	M12	13X24	4GX2.5	M20X1.5

