
MV2600/1

Three phase-6poles-1000RPM-50HZ
220/400 Voltage

Mechanical Features			Electric Features		
General			**General**		
Working moment	**467.44**	kg.cm	Nominal voltage	**Δ:220V**	**Y:400V**
Unblance	**233.72**	kg.cm	Input power	**1.96KW**	
Force	**2610**	kg	Current A max	**Y:3.63A**	
Bearing			Power factor	**0.68**	
TYPE(FAG/SKF)	**NJ2311**		La/in	4.8	
	100%	**>100000**	**Certification**		
Life(h)	80%	**>100000**	CE	**EAC**	
	50%	**>100000**			
Bearing Grease			IP65		
Lube Schedule	26g		Amb Temp. **(-20°~+40°)**		
Lube replacement	52g				
Grease Type	SKF LGHP 2				

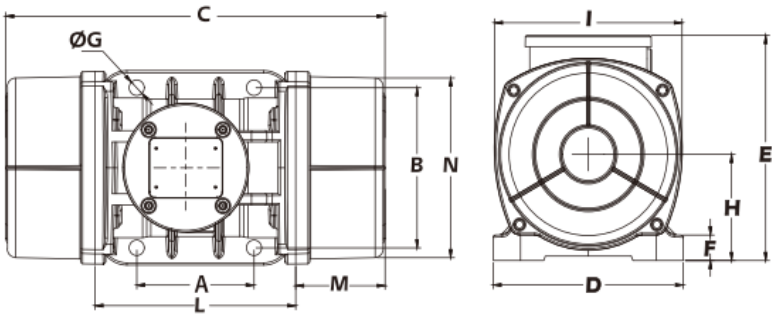

A	155
B	255
C	698.5
M	210
G	25
Holes	4
D	302
E	318
F	34
H	148.5
I	281
L	278.5
N	264

Clamping torque(Nm)	550

n.weight	Screw	washer	Cable type	Cable Glande
143	M22	22X39	4GX6	M32X1.5