
MV4700-1

Three phase-6poles-1000RPM-50HZ
230/400 Voltage

Mechanical Features			Electric Features		
General			**General**		
Working moment	**838.34**	kg.cm	Nominal voltage	**Δ:230V**	**Y:400V**
Unblance	**419.17**	kg.cm	Input power	**3.2KW**	
Force	**4791**	kg	Current A max	**6.5A**	
Bearing			Power factor	**0.64**	
TYPE	**NJ2315**		La/in	5.5	
	100%	**64460**	**Certification**		
Life(h)	80%	**>100000**	ETL CLASS II DIV.II	**T4**	
	50%	**>100000**	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule	60g		IP65		
Lube replacement	120g		Amb Temp. **(-20°~+40°)**		
Grease Type	SKF LGHP 2				

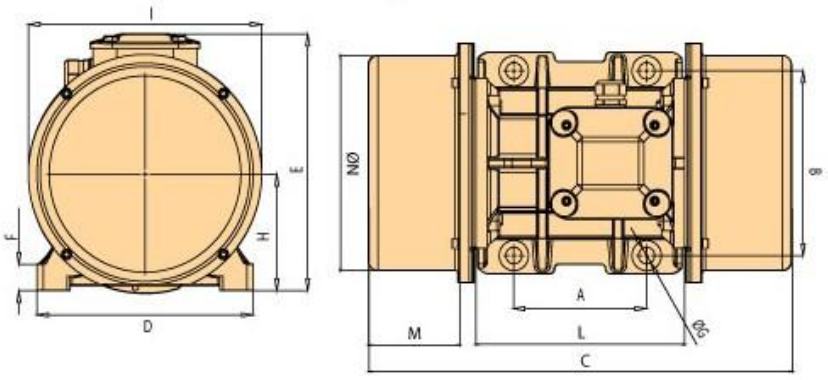

A	180
B	280
C	737.5
M	208
G	26
Holes	4
D	336
E	353
F	35
H	167
I	345
L	321
N	310

Clamping torque(Nm)	696

n.weight	Screw	washer	Cable type	Cable Glande
231	M24	25X44	4GX6	M32X1.5