
MV400/3M

Single phase-2poles-3000RPM-50HZ
230 Voltage

Mechanical Features		
General		
Working moment	**7.96**	kg.cm
Unblance	**3.98**	kg.cm
Force	**407**	kg
Bearing		
TYPE	**6303**	
	100%	**1925**
Life(h)	80%	**3615**
	50%	**12245**
Bearing Grease		
Lube Schedule		
Lube replacement		
Grease Type		

Electric Features	
General	
Nominal voltage	**230V**
Input power	**0.3KW**
Current A max	**1.68A**
Power factor	**0.88**
La/in	**3.5**
Certification	
ETL CLASS II DIV.II	**T4**
GROUP F G TENV NEMA 4	
IP65	
Amb Temp.	**(-20°~+40°)**

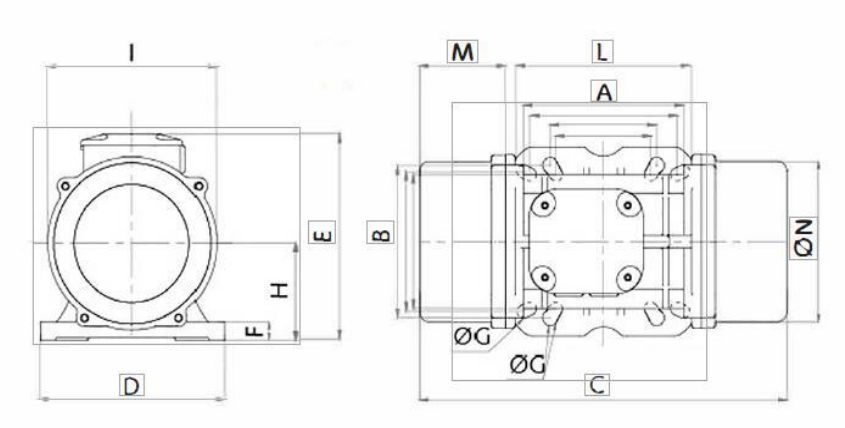

A	90
B	125
C	273
M	55
G	13
Holes	4
D	155
E	175
F	15
H	79
I	142
L	163
N	131

Clamping torque(Nm)	80

weight	Screw	washer	Cable type	Cable Glande
10.2	M12	13X24	4GX2.5	M20X1.5

