


CATALOG GHIDAJE LANT GALL TIP T



ALL INDUSTRIAL

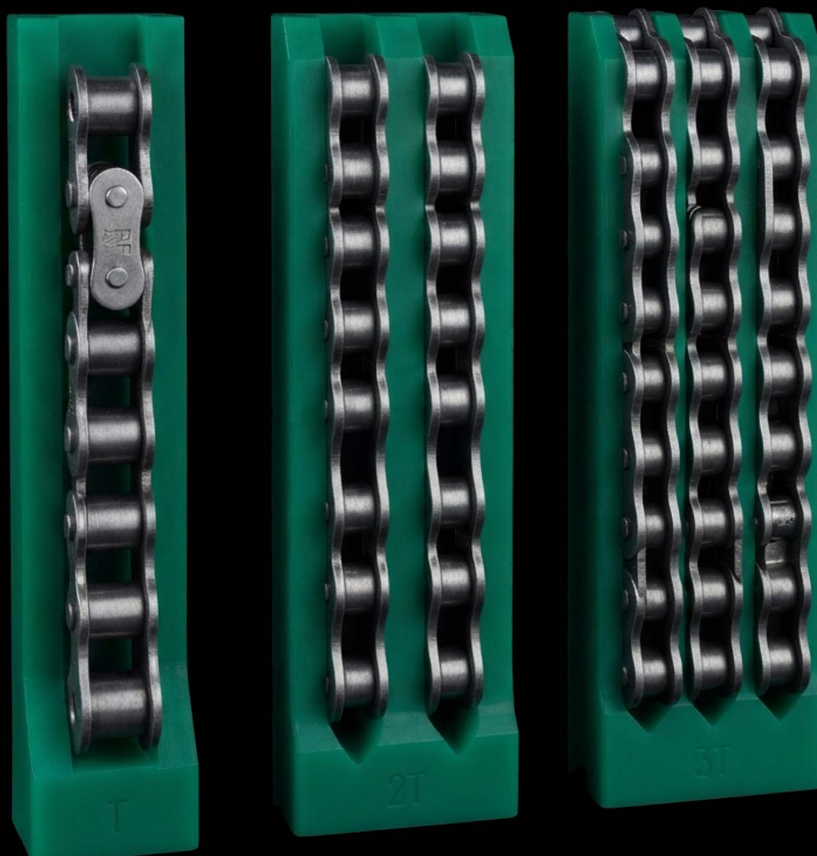

GHIDAJ PENTRU LANT CU ROLE SIMPLE – PROFIL T

Lungime standard: 2 metri

(Alte lungimi, la cerere)

Material: **PE-UHMW (polietilena cu masa moleculara foarte mare – peste 1.000.000 g/mol)**

Culoare: **verde**

Greutate specifica: **0,945 g/cm³**

Coeficient de frecare dinamică: **0,2 (P = 0,50 N/mm² – V = 0,6 m/s – T = 40°C)**

Temperatura de lucru: **-70°C ... +65°C**

Dilatare termică liniară: **2 mm la fiecare 10°C, pornind de la o temperatură ambiantă de 20°C**

GUIDE FOR SIMPLE ROLLER CHAIN - 1T-PROFILE

Standard Length 2 METRES

(Other lengths on request)

Material: **PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)**


Color: **green**

Specific weight: **0.945 g/cm³**

Dynamic friction coefficient: **0.2 (P = 0.05N/mm² – V = 0.6 m/s – T = 40°C)**

Operating temperature: **-70°C +65°C**

Linear thermal expansion: **2 mm every 10°C starting from a room temperature of 20°C**



articol item	tip lant chain type	cod. ISO ISO code	B	H	b	h	greutate neta Kg net weight Kg
S1T010URG	3/8" x 7/32"	06-B1	15	10	5,4	1,5	0,27
S1T110URG	1/2" x 5/16"	08-B1	20	10	7,4	2,2	0,32
S1T115URG	1/2" x 5/16"	08-B1	20	15	7,4	2,2	0,53
S1T120URG	1/2" x 5/16"	08-B1	20	20	7,4	2,2	0,71
S1T210URG	5/8" x 3/8"	10-B1	20	10	9,2	2,6	0,31
S1T215URG	5/8" x 3/8"	10-B1	20	15	9,2	2,6	0,54
S1T220URG	5/8" x 3/8"	10-B1	20	20	9,2	2,6	0,73
S1T310URG	3/4" x 7/16"	12-B1	25	10	11,3	2,4	0,44
S1T315URG	3/4" x 7/16"	12-B1	25	15	11,3	2,4	0,66
S1T320URG	3/4" x 7/16"	12-B1	25	20	11,3	2,4	0,87
S1T415URG	1" x 17,02"	16-B1	40	15	16,5	3,5	0,93
S1T420URG	1" x 17,02"	16-B1	40	20	16,5	3,5	1,3
S1T515URG	1"1/4 x 3/4"	20-B1	45	15	19	4,3	1,04
S1T520URG	1"1/4 x 3/4"	20-B1	45	20	19	4,3	1,48
S1T615URG	1"1/2 x 1"	24-B1	60	15	24,6	5,6	1,32
S1T620URG	1"1/2 x 1"	24-B1	60	20	24,6	5,6	1,91
S1T720URG	1"3/4 x 1"1/4	28-B1	75	20	30	6,9	2,25
S1T820URG	2" x 1"1/4	32-B1	80	20	30	7,8	2,28

GHIDAJ PENTRU LANT CU ROLE DUBLE – PROFIL 2T

Lungime standard: 2 metri

(Alte lungimi, la cerere)

Material: PE-UHMW - polietilena cu masa moleculara foarte mare (peste 1.000.000 g/mol)

Culoare: verde

Greutate specifica: 0,945 g/cm³Coeficient de frecare dinamica: 0,2 (P = 0,50 N/mm² – V = 0,6 m/s – T = 40°C)

Temperatura de lucru: -70°C ... +65°C

Dilatate termica liniara: 2 mm la fiecare 10°C, pornind de la o temperatura ambianta de 20°C

GUIDE FOR DOUBLE ROLLER CHAIN - 2T-PROFILE

Standard Length 2 METRES

(Other lengths on request)


Material: PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)

Color: green

Specific weight: 0.945 g/cm³Dynamic friction coefficient: 0.2 (P = 0.05N/mm² – V = 0.6 m/s – T = 40°C)

Operating temperature: -70°C +65°C

Linear thermal expansion: 2 mm every 10°C starting from a room temperature of 20°C

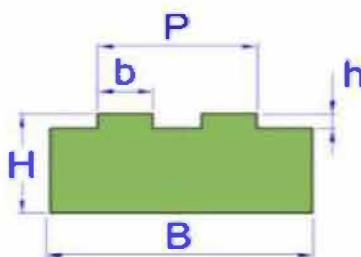

articol item	tip lant chain type	cod. ISO ISO code	B	H	b	h	P	greutate neta Kg net weight Kg
S2T010URG	3/8" x 7/32"	06-B2	25	10	5,4	1,5	15,8	0,51
S2T110URG	1/2" x 5/16"	08-B2	35	10	7,4	2,2	21,4	0,71
S2T115URG	1/2" x 5/16"	08-B2	35	15	7,4	2,2	21,4	1,05
S2T120URG	1/2" x 5/16"	08-B2	35	20	7,4	2,2	21,4	1,36
S2T210URG	5/8" x 3/8"	10-B2	40	10	9,2	2,6	25,8	0,84
S2T215URG	5/8" x 3/8"	10-B2	40	15	9,2	2,6	25,8	1,22
S2T220URG	5/8" x 3/8"	10-B2	40	20	9,2	2,6	25,8	1,6
S2T315URG	3/4" x 7/16"	12-B2	45	15	11,3	2,4	30,8	1,18
S2T320URG	3/4" x 7/16"	12-B2	45	20	11,3	2,4	30,8	1,61
S2T415URG	1" x 17,02"	16-B2	65	15	16,5	3,5	48,4	1,87
S2T420URG	1" x 17,02"	16-B2	65	20	16,5	3,5	48,4	2,32
S2T515URG	1"1/4 x 3/4"	20-B2	70	15	19	4,3	54,5	1,86
S2T520URG	1"1/4 x 3/4"	20-B2	70	20	19	4,3	54,5	2,49
S2T615URG	1"1/2 x 1"	24-B2	88	15	24,6	5,6	73	3,15
S2T620URG	1"1/2 x 1"	24-B2	88	20	24,6	5,6	73	4,66
S2T720URG	1"3/4 x 1"1/4	28-B2	105	25	30	6,9	89,6	5,66
S2T820URG	2" x 1"1/4	32-B2	105	30	30	7,8	88,7	6,2

GHIDAJ PENTRU LANT CU ROLE TRIPLE – PROFIL 3T

Lungime standard: 2 metri

(Alte lungimi, la cerere)

Material: **PE-UHMW - polietilena cu masa moleculara foarte mare (peste 1.000.000 g/mol)**

Culoare: **verde**

Greutate specifica: **0,945 g/cm³**

Coeficient de frecare dinamica: **0,2 (P = 0,50 N/mm² – V = 0,6 m/s – T = 40°C)**

Temperatura de lucru: **-70°C ... +65°C**

Dilatate termica liniara: **2 mm la fiecare 10°C, pornind de la o temperatura ambianta de 20°C**

GUIDE FOR TRIPLEX ROLLER CHAIN - 3T-PROFILE

Standard Length 2 METRES

(Other lengths on request)

Material: **PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)**


Color: **green**

Specific weight: **0.945 g/cm³**

Dynamic friction coefficient: **0.2 (P = 0.05N/mm² – V = 0.6 m/s – T = 40°C)**

Operating temperature: **-70°C +65°C**

Linear thermal expansion: **2 mm every 10°C starting from a room temperature of 20°C**

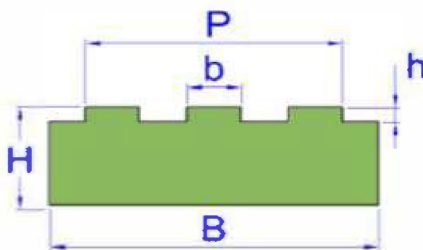

articol item	tip lant chain type	cod. ISO ISO code	B	H	b	h	P	greutate neta Kg net weight Kg
S3T010URG	3/8" x 7/32"	06-B3	35	10	5,4	1,5	25,9	0,62
S3T110URG	1/2" x 5/16"	08-B3	45	10	7,4	2,2	35,2	0,78
S3T115URG	1/2" x 5/16"	08-B3	45	15	7,4	2,2	35,2	1,2
S3T120URG	1/2" x 5/16"	08-B3	45	20	7,4	2,2	35,2	1,63
S3T210URG	5/8" x 3/8"	10-B3	55	10	9,2	2,6	42,4	0,92
S3T215URG	5/8" x 3/8"	10-B3	55	15	9,2	2,6	42,4	1,58
S3T220URG	5/8" x 3/8"	10-B3	55	20	9,2	2,6	42,4	2,16
S3T315URG	3/4" x 7/16"	12-B3	60	15	11,3	2,4	50,2	2,36
S3T320URG	3/4" x 7/16"	12-B3	60	20	11,3	2,4	50,2	3,5
S3T415URG	1" x 17,02"	16-B3	95	15	16,5	3,5	80,3	4,2
S3T420URG	1" x 17,02"	16-B3	95	20	16,5	3,5	80,3	4,6