
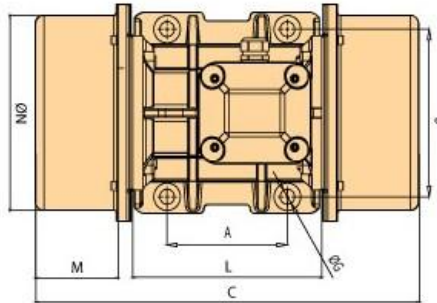


10000/15

Three phase-4poles-1500RPM-50HZ
400 Voltage

Mechanical Features			Electric Features	
General			General	
Working moment	800.11	kg.cm	Nominal voltage	Δ :400V
Unbalance	400.06	kg.cm	Input power	7.8KW
Force	10052	kg	Current A max	14.4A
Bearing			Power factor	0.76
TYPE	NJ2317		La/in	6.5
	100%	7664	Certification	
Life(h)	80%	16126	ETL CLASS II DIV.II	T4
	50%	77254	GROUP F G TENV NEMA 4	
Bearing Grease			IP65	
Lube Schedule	90g		Amb Temp. (-20°~+40°)	
Lube replacement	180g			
Grease Type	SKF LGHP 2			



A	125
B	380
C	747
M	170
G	39
Holes	6
D	446
E	415
F	42
H	206
I	400
L	405
N	378

Clamping torque(Nm) 1864

n.weight	Screw	washer	Cable type	Cable Glande
329	M36	37X66	4GX6	M32X1.5