
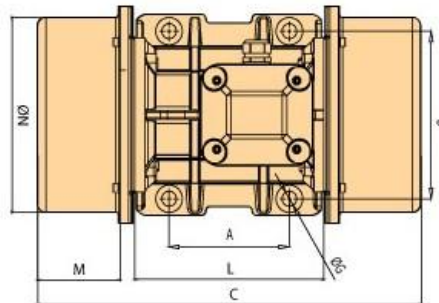


Motor vibrator 1200/3

**Three phase-2poles-3000RPM-50HZ
230/400 Voltage**

Mechanical Features			Electric Features		
General			General		
Working moment	20.26	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	10.13	kg.cm	Input power	0.95KW	
Force	1006	kg	Current A max	Δ:3.22A	Y:1.85A
Bearing			Power factor	0.82	
TYPE	6306		La/in	4.4	
	100%	849	Certification		
Life(h)	80%	1573	ETL CLASS II DIV.II	T4	
	50%	5393	GROUP F G TENV NEMA 4		
Bearing Grease			IP66		
Lube Schedule			Amb Temp. (-20°~+40°)		
Lube replacement					
Grease Type					



A	120
B	170
C	321
M	58
G	17
Holes	4
D	208
E	210
F	22
H	94
I	180
L	205
N	170

Clamping torque(Nm) **185**

n.weight	Screw	washer	Cable type	Cable Glande
22.4	M16	17X30	4GX2.5	M20X1.5