
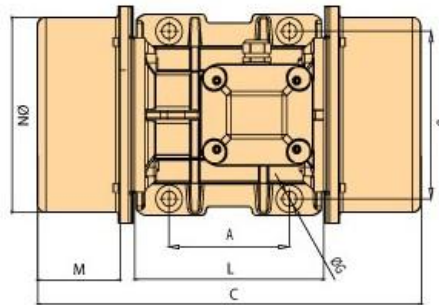


Motor Vibrator 1300/3

**Three phase-2poles-3000RPM-50HZ
230/400 Voltage**

Mechanical Features			Electric Features		
General			General		
Working moment	26.58	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	13.29	kg.cm	Input power	1.3KW	
Force	1350	kg	Current A max	Δ:4.25A	Y:2.44A
Bearing			Power factor	0.77	
TYPE	NJ306		La/in	5.2	
	100%	3262	Certification		
Life(h)	80%	6863	ETL CLASS II DIV.II	T4	
	50%	32880	GROUP F G TENV NEMA 4		
Bearing Grease			IP65		
Lube Schedule	7g		Amb Temp. (-20°~+40°)		
Lube replacement	14g				
Grease Type	SKF LGHP 2				



A	120
B	170
C	321
M	58
G	17
Holes	4
D	208
E	210
F	22
H	94
I	180
L	205
N	170

Clamping torque(Nm) **185**

n.weight	Screw	washer	Cable type	Cable Glande
23	M16	17X30	4GX2.5	M20X1.5