
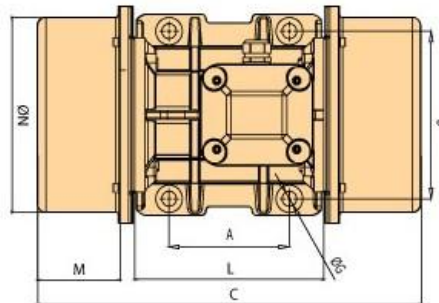


MV1400/15

Three phase-4poles-1500RPM-50HZ 230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	108.57	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unblance	54.28	kg.cm	Input power	0.9KW	
Force	1427	kg	Current A max	Δ:3.08A	Y:1.78A
Bearing			Power factor	0.72	
TYPE	NJ2308		La/in	4	
	100%	49235	Certification		
Life(h)	80%	>100000	ETL CLASS II DIV.II	T4	
	50%	>100000	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule	15g		ATEX II 3D Ex tD A22	T135°	
Lube replacement	30g		IP65		
Grease Type	SKF LGHP 2		Amb Temp.	(-20°~+40°)	



A	140
B	190
C	444.5
M	110
G	17
Holes	4
D	230
E	262
F	30
H	120
I	237
L	220
N	222

Clamping torque(Nm) 185

n.weight	Screw	washer	Cable type	Cable Glande
60.5	M16	17X30	4GX2.5	M20X1.5