
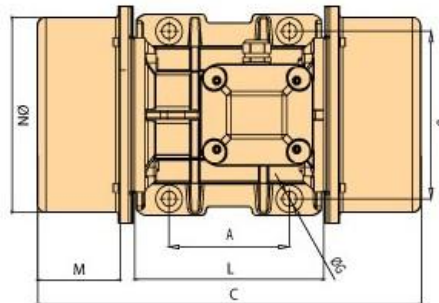


MV1500/1

Three phase-6poles-1000RPM-50HZ 230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	284.76	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	142.38	kg.cm	Input power	1.0KW	
Force	1520	kg	Current A max	Y:2A	
Bearing			Power factor	0.72	
TYPE	NJ2308		La/in	3.5	
	100%	70146	Certification		
Life(h)	80%	>100000	ETL CLASS II DIV.II	T4	
	50%	>100000	GROUP F G TENV NEMA 4		
Bearing Grease			IP65		
Lube Schedule	15g		Amb Temp. (-20°~+40°)		
Lube replacement	30g				
Grease Type	SKF LGHP 2				



A	140
B	190
C	564.5
M	170
G	17
Holes	4
D	230
E	262
F	30
H	122
I	237
L	224.5
N	222

Clamping torque(Nm) **185**

n.weight	Screw	washer	Cable type	Cable Glандe
84	M20	21X37	4GX4	M25X1.5