


Motor Vibrator 400/3

Three phase-2poles-3000RPM-50HZ 230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	7.96	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	3.98	kg.cm	Input power	0.3KW	
Force	407	kg	Current A max	Δ:1.01	Y:0.58A
Bearing			Power factor	0.88	
TYPE	6303		La/in	3.5	
	100%	1925	Certification		
Life(h)	80%	3615	ETL CLASS II DIV.II	T4	
	50%	12245	GROUP F G TENV NEMA 4		
Bearing Grease			IP65		
Lube Schedule			Amb Temp. (-20°~+40°)		
Lube replacement					
Grease Type					

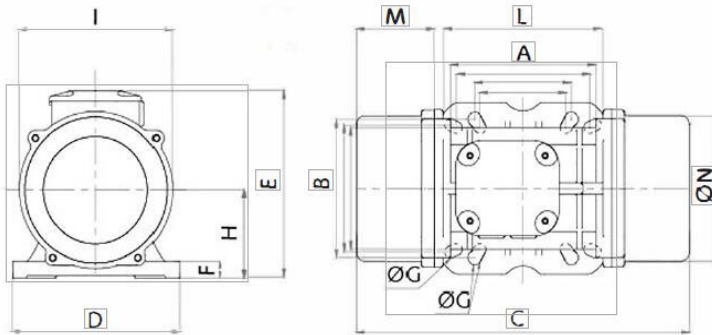

A	90
B	125
C	273
M	55
G	13
Holes	4
D	155
E	175
F	15
H	79
I	142
L	163
N	131

Clamping torque(Nm) **80**

weight	Screw	washer	Cable type	Cable Glande
10.2	M12	13X24	4GX2.5	M20X1.5