


Motor Vibrator 60/3

Three phase-2poles-3000RPM-50HZ
230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	1.31	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	0.66	kg.cm	Input power	0.08KW	
Force	68	kg	Current A max	Δ:0.28	Y:0.16A
Bearing			Power factor	0.74	
TYPE(FAG/SKF)	6202		La/in	3	
	100%	33172	Certification		
Life(h)	80%	64789	ETL CLASS II DIV.II	T4	
	50%	>100000	GROUP F G TENV NEMA 4		
Bearing Grease			IP65		
Lube Schedule			Amb Temp. (-20°~+40°)		
Lube replacement					
Grease Type					

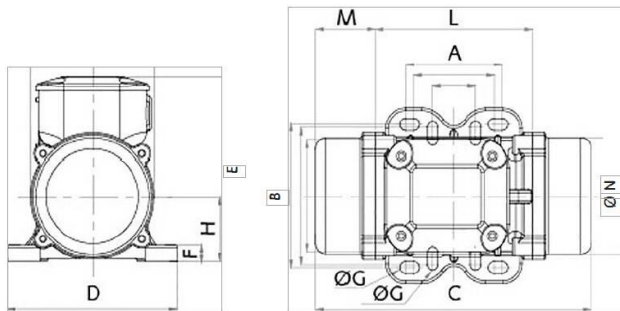

A	62-74
	33
B	106
	82-102
C	211
M	45
G	9
	7
Holes	4
	4
D	130
E	136
F	12
H	48
I	94
L	121
N	85

Clamping torque(Nm) 23
9

weight	Screw	washer	Cable type	Cable Glande
4.6	M8	8.4X16	4GX1.5	M16X1.5
	M6	6.4X12		