
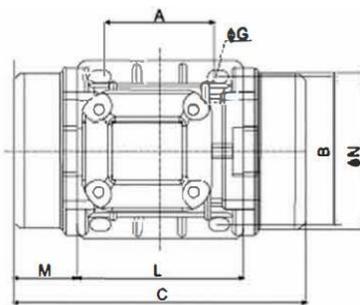


700/3

Three phase-2poles-3000RPM-50HZ 230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	14.9	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	7.45	kg.cm	Input power	0.66KW	
Force	758	kg	Current A max	Δ:2.17A	Y:1.25A
Bearing			Power factor	0.83	
TYPE	6306		La/in	4.3	
	100%	1876	Certification		
Life(h)	80%	3586	ETL CLASS II DIV.II	T4	
	50%	10008	GROUP F G TENV NEMA 4		
Bearing Grease			IP65		
Lube Schedule			Amb Temp. (-20°~+40°)		
Lube replacement					
Grease Type					



A	105
B	140
C	334
M	78
G	13
Holes	4
D	168
E	196
F	22
H	92
I	169
L	178
N	158

Clamping torque(Nm) 80

weight	Screw	washer	Cable type	Cable Glande
17.2	M12	13X24	4GX2.5	M20X1.5