


MV90/15

Three phase-4poles-1500RPM-50HZ 230/400 Voltage

Mechanical Features			Electric Features		
General			General		
Working moment	5.97	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unblance	2.98	kg.cm	Input power	0.12KW	
Force	92	kg	Current A max	Δ:0.52A	Y:0.31A
Bearing			Power factor	0.5	
TYPE	6302 2Z		La/in	2.4	
	100%	>100000	Certification		
Life(h)	80%	>100000	ETL CLASS II DIV.II	T4	
	50%	>100000	GROUP F G TENV NEMA 4		
Bearing Grease					
Lube Schedule			IP65		
Lube replacement			Amb Temp. (-20°~+40°)		
Grease Type					

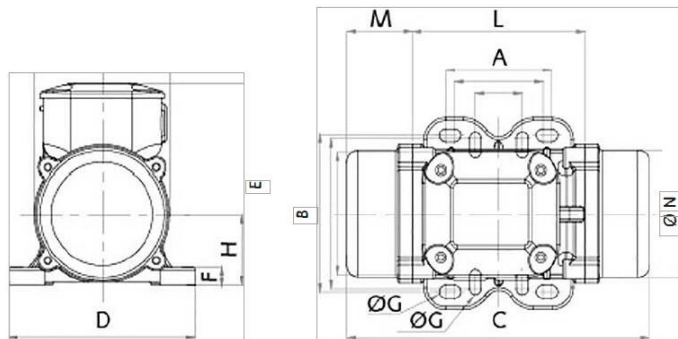

A	62-74
B	106
C	231
M	54
G	9
Holes	4
D	131
E	159
F	15
H	64
I	121
L	123
N	112

Clamping torque(Nm) 23

weight	Screw	washer	Cable type	Cable Glande
6.8	M8	8.4X16	4GX2.5	M20X1.5