
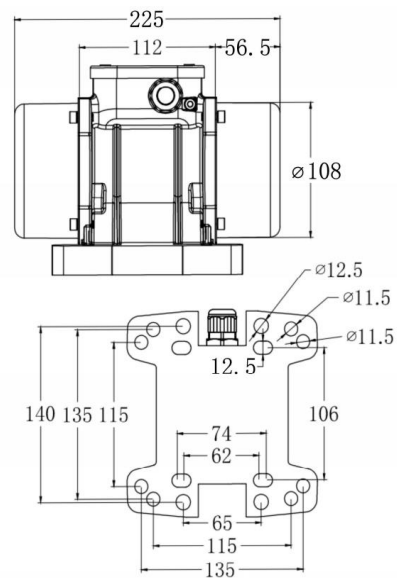


## MV50DC-24

### DIRECT CURRENT-3600RPM 24V

| Mechanical Features |           |       | Electric Features     |        |
|---------------------|-----------|-------|-----------------------|--------|
| General             |           |       | General               |        |
| Working moment      | 4.17      | kg.cm | Nominal voltage       | DC 24V |
| Unbalance           | 2.09      | kg.cm | Input power           | 0.16KW |
| Force               | 200       | kg    | Current A max         | 6.67A  |
| Bearing             |           |       | Power factor          |        |
| TYPE                | 6301+6302 |       | La/in                 | 4      |
|                     | 100%      | 3732  | Certification         |        |
| Life(h)             | 80%       | 6469  | CE,CCC,EAC            |        |
|                     | 50%       | 30139 | IP66                  |        |
| Bearing Grease      |           |       | Amb Temp. (-20°~+40°) |        |
| Lube Schedule       |           |       |                       |        |
| Lube replacement    |           |       |                       |        |
| Grease Type         |           |       |                       |        |

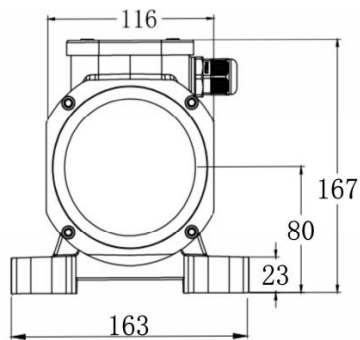

Clamping torque(Nm) 80

| weight | Screw | washer  | Cable type | Cable Glande |
|--------|-------|---------|------------|--------------|
| 6.5    | M8    | 8.4X16  | 2GX1.5     | M16X1.5      |
|        | M10   | 10.5*20 |            |              |
|        | M12   | 13*24   |            |              |