


MV50DC-24

DIRECT CURRENT-3600RPM 24V

Mechanical Features			Electric Features	
General			General	
Working moment	1	kg.cm	Nominal voltage	DC 24V
Unbalance	0.5	kg.cm	Input power	0.10KW
Force	50	kg	Current A max	4.2A
Bearing			Power factor	
TYPE	6202+6301		La/in	3
	100%	>100000	Certification	
Life(h)	80%	>100000	CE,CCC,EAC	
	50%	>100000	IP66	
Bearing Grease			Amb Temp. (-20°~+40°)	
Lube Schedule				
Lube replacement				
Grease Type				

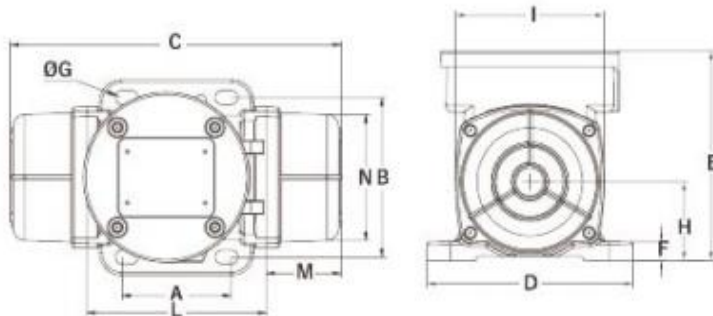

A	62-74
B	106
C	211
M	45
G	9
Holes	4
D	130
E	136
F	12
H	48
I	94
L	121
N	85

Clamping torque(Nm) 23

weight	Screw	washer	Cable type	Cable Glande
4.5	M8	8.4X16	4GX1.5	M16X1.5