
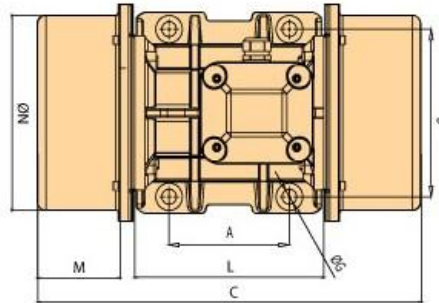


800/3

**Three phase-2poles-3000RPM-50HZ
230/400 Voltage**

Mechanical Features			Electric Features		
General			General		
Working moment	15.68	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unblance	7.84	kg.cm	Input power	0.75KW	
Force	815	kg	Current A max	Δ:2.52A	Y:1.45A
Bearing			Power factor	0.79	
TYPE	6306		La/in	3.8	
	100%	1414	Certification		
Life(h)	80%	2775	ETL CLASS II DIV.II	T4	
	50%	9909	GROUP F G TENV NEMA 4		
Bearing Grease			ATEX II 3D Ex tD A22 T135°		
Lube Schedule			IP66		
Lube replacement			Amb Temp. (-20°~+40°)		
Grease Type					



A	120
B	170
C	321
M	58
G	17
Holes	4
D	208
E	210
F	22
H	94
I	180
L	205
N	170

Clamping torque(Nm) 185

n.weight	Screw	washer	Cable type	Cable Glande
21.8	M16	17X30	4GX2.5	M20X1.5