




Winkellaschen-Anbauteile für Rollenketten

Bend attachments for roller chains

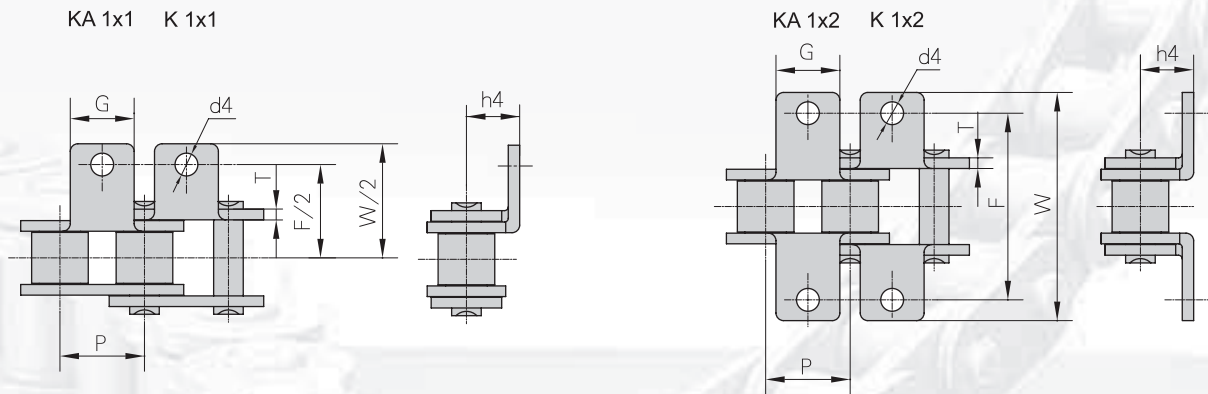



Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	F	W	T	h4	d4
		mm	mm	mm	mm	mm	mm	mm
*06C	35	9.525	7.9	19.00	28.60	1.30	6.35	3.4
08A	40	12.700	9.5	25.40	35.20	1.50	7.90	3.4
085	41	12.700	9.5	24.00	33.4	1.30	6.90	3.6
10A	50	15.875	12.7	31.75	46.2	2.03	10.30	5.5
12A	60	19.050	15.9	38.10	55.6	2.42	11.90	5.5
16A	80	25.400	19.1	50.80	64.8	3.25	15.90	6.8
20A	100	31.750	25.4	63.50	87.3	4.00	19.80	9.2
24A	120	38.100	28.6	76.20	108.5	4.80	23.00	9.8
28A	140	44.450	34.9	88.90	123.0	5.60	28.60	11.4
32A	160	50.800	38.1	101.60	142.8	6.40	31.75	13.1
40A	200	63.500	50.8	127.00	179.0	8.00	42.88	16.3
*06B		9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B		12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B		15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B		19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B		25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B		31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B		38.100	30.0	76.20	108.4	4.80	26.67	10.5
28B		44.450	35.0	88.90	123.0	6.00	28.58	13.1
32B		50.800	38.1	101.60	142.8	6.00	31.75	13.1

* gerade Laschen
* Straight side plates



Planlaschen-Anbauteile für Rollenketten

Straight attachments for roller chains

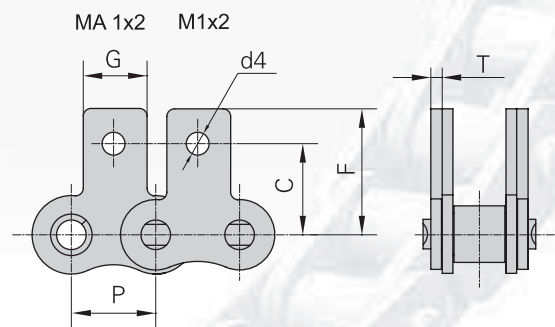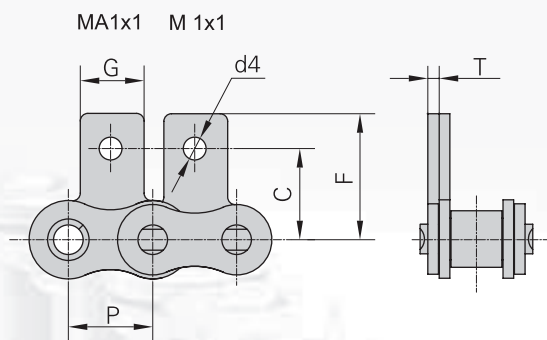



Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	C	F	T	d4
		mm	mm	mm	mm	mm	mm
06C	35	9.525	7.9	9.50	14.55	1.30	3.4
08A	40	12.700	9.5	12.70	19.05	1.50	3.4
085	41	12.700	9.5	11.85	16.55	1.30	3.6
10A	50	15.875	12.7	15.90	25.25	2.03	5.5
12A	60	19.050	15.9	18.30	29.33	2.42	5.5
16A	80	25.400	19.1	24.60	34.70	3.25	6.8
20A	100	31.750	25.4	31.80	43.30	4.00	9.2
24A	120	38.100	28.6	36.50	51.60	4.80	9.8
28A	140	44.450	34.9	44.50	62.00	5.60	11.4
32A	160	50.800	38.1	50.80	69.85	6.40	13.1
40A	200	63.500	50.8	63.50	88.9	8.00	16.3
*06B		9.525	8.0	9.52	13.50	1.30	3.5
08B		12.700	9.5	13.35	18.90	1.60	4.3
10B		15.875	14.3	16.50	22.95	1.70	5.3
12B		19.050	16.0	21.45	28.60	1.85	6.4
16B		25.400	19.1	23.15	34.00	3.10	6.4
20B		31.750	35.0	30.50	45.70	3.50	9.0

* gerade Laschen
* Straight side plates



Winkellaschen-Anbauteile für Rollenketten

Bent attachments for roller chains

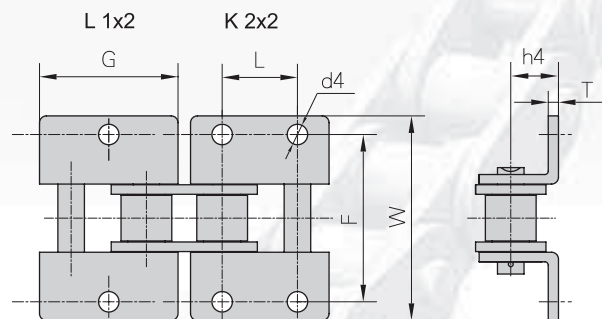
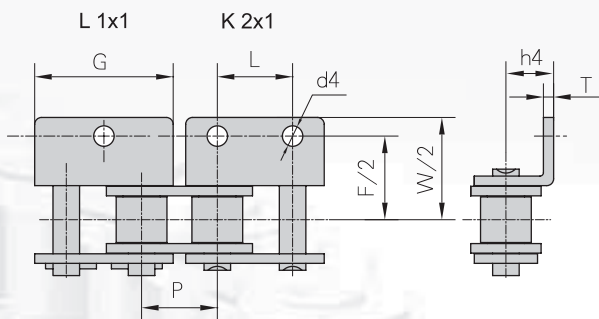


Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	L	F	W	T	h4	d4
		mm	mm	mm	mm	mm	mm	mm	mm
06C	35	9.525	17.32	9.525	19.00	28.6	1.30	6.35	2.8
08A	40	12.700	23.00	12.700	25.40	35.6	1.50	7.90	3.4
085	41	12.700	22.30	12.700	24.00	35.0	1.30	7.20	4.85
10A	50	15.875	28.80	15.875	31.75	46.8	2.03	10.30	5.5
12A	60	19.050	34.65	19.050	38.10	56.4	2.42	11.90	5.5
16A	80	25.400	45.90	25.400	50.80	73.2	3.25	15.90	6.8
20A	100	31.750	57.65	31.750	63.50	89.8	4.00	19.80	9.2
24A	120	38.100	69.30	38.100	76.20	108.8	4.80	23.00	9.8
28A	140	44.450	80.45	44.450	88.90	123.0	5.60	28.60	11.4
32A	160	50.800	92.00	50.800	101.60	142.8	6.40	31.75	13.1
40A	200	63.500	115.5	63.500	127.00	179.0	8.00	42.88	16.3
08B		12.700	24.00	12.700	25.40	36.4	1.60	8.90	4.3
10B		15.875	29.58	15.875	31.80	44.6	1.70	10.31	5.3
12B		19.050	34.05	19.050	38.10	52.4	1.85	13.46	6.4
16B		25.400	46.40	25.400	50.80	72.6	3.10	15.88	6.4
20B		31.750	58.10	31.750	63.00	100.5	3.50	19.80	9.0
24B		38.100	71.30	38.100	76.20	108.4	4.80	26.67	10.5
28B		44.450	81.1	44.450	88.90	123.0	6.00	28.58	13.1
32B		50.800	92.8	50.800	101.60	142.8	6.00	31.75	13.1



Planlaschen-Anbauteile für Rollenketten

Straight attachments for roller chains

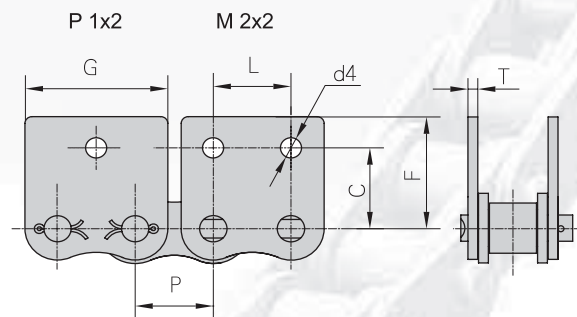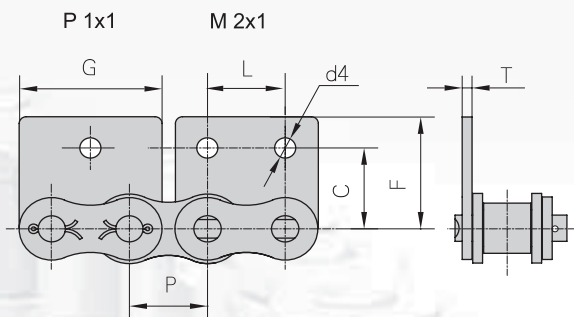


Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	L	C	F	T	d4
		mm	mm	mm	mm	mm	mm	mm
06C	35	9.525	17.32	9.525	9.50	14.55	1.30	2.8
08A	40	12.700	23.00	12.700	12.70	17.40	1.50	3.4
085	41	12.700	21.20	12.700	11.85	16.55	1.30	3.6
10A	50	15.875	28.80	15.875	15.90	23.05	2.03	5.5
12A	60	19.050	34.65	19.050	18.30	26.86	2.42	5.5
16A	80	25.400	45.90	25.400	24.60	35.45	3.25	6.8
20A	100	31.750	57.65	31.750	31.80	44.00	4.00	9.2
24A	120	38.100	69.30	38.100	36.50	51.60	4.80	9.8
28A	140	44.450	80.45	44.450	44.50	62.00	5.60	11.4
32A	160	50.800	92.00	50.800	50.80	69.85	6.40	13.1
40A	200	63.500	115.5	63.500	63.50	88.90	8.00	16.3
08B		12.700	23.30	12.700	13.35	18.90	1.60	4.3
10B		15.875	29.58	15.875	16.50	22.95	1.70	5.3
12B		19.050	34.05	19.050	21.45	28.60	1.85	6.4
16B		25.400	46.40	25.400	23.15	34.00	3.10	6.4
20B		31.750	58.10	31.750	30.50	45.70	3.50	9.0




Winkellaschen und Planlaschen-Anbauteile für Rollenketten

Bent attachments and straight attachments for roller chains

KA 1x1 K 1x1

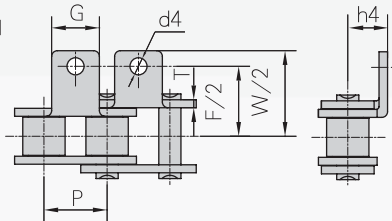


KA 1x2 K 1x2

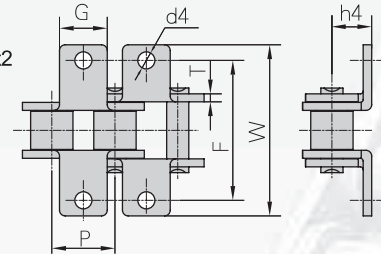


Flexon Chain No.	P	G	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm
08AA1F1	12.700	9.50	38.50	44.5	1.50	8.20	3.6
*C08AA1F1	12.700	10.00	25.40	33.4	1.50	9.10	3.4
08AA1F2	12.700	9.50	25.40	35.2	1.50	7.90	4.85
10AK1F3	15.875	14.29	31.75	46.2	2.03	10.30	5.5
10AK1F5	15.875	20.00	39.00	50.1	2.03	12.50	M5
10AHK1F1	15.875	12.70	34.00	48.4	2.42	10.30	M5
12AK1F1	19.050	15.90	40.00	55.6	2.42	11.9	6.2
12AK1F4	19.050	15.90	38.10	55.5	2.42	11.9	M5
28AA1F1	44.450	34.90	88.90	123.0	5.60	28.60	12.0
28AA1F2	44.450	44.45	88.90	124.0	5.60	28.60	12.0
08BA1F2	12.700	11.40	38.60	49.6	1.60	8.90	3.5
08BK1F5	12.700	9.50	29.00	38.7	1.60	7.10	4.5
08BA1F6	12.700	18.00	25.80	37.8	1.60	8.00	4.2
08BK1F7	12.700	9.50	29.00	39.0	1.60	7.00	4.5
08BF30	12.700	18.00	27.20	40.0	1.60	8.00	4.3
08BF33	12.700	9.50	27.74	38.8	1.60	8.50	3.1
12BA1F1	19.05	16.00	38.10	52.4	1.85	13.46	8.2
16BK1F3	25.400	19.10	50.80	72.6	3.10	15.88	8.2
16BK1F4	25.400	36.00	54.00	78.6	3.10	16.00	8.2
16BK1F5	25.400	25.00	57.80	83.6	3.10	19.00	9.0
16BF14	25.400	36.20	53.90	77.8	3.10	18.00	M6

MA 1x1 M 1x1

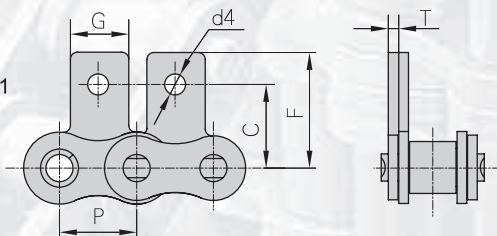

MA 1x2 M 1x2

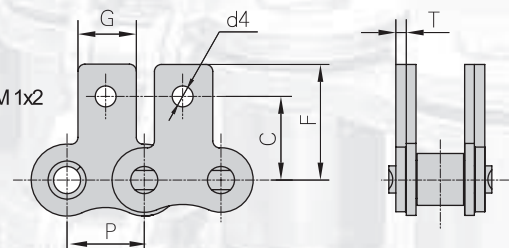



Flexon Chain No.	P	G	C	F	T	d4
	mm	mm	mm	mm	mm	mm
16AWSK1F3	25.400	45.9	16.0	34.40	3.25	14.52
08BSA1F1	12.700	18.0	15.0	21.50	1.60	6.3
24BSK1F1	38.100	30.0	42.65	61.70	4.80	10.5

* gerade Laschen
* Straight side plates





Winkellaschen und Planlaschen-Anbauteile für Rollenketten

Bent attachments and straight attachments for roller chains

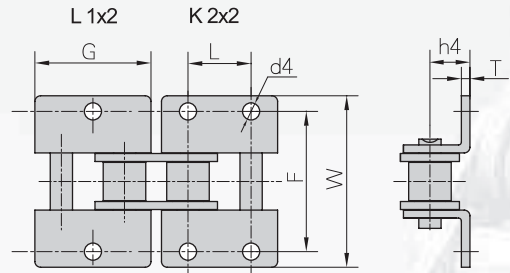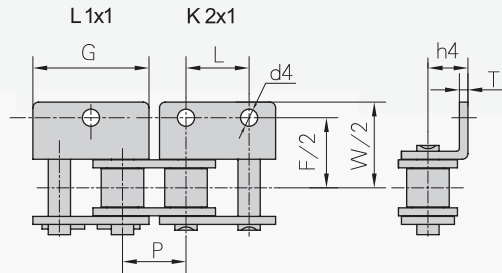

Flexon Chain No.	P	G	L	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm
428HWK1	12.700	23.30		38.00	56.4	2.42	11.0	5.5
10AWK1F1	15.875	28.80		31.75	46.0	2.03	10.3	8.2
10AWK1F2	15.875	30.00		31.75	46.0	2.03	10.3	5.2
12AWA2F1	19.050	34.65	19.050	38.10	56.4	2.42	11.91	6.35
16AWK1F1	25.400	45.90		50.80	73.2	3.25	15.90	8.0
*06BWK2F1	9.525	17.70	9.525	19.05	28.5	1.30	6.70	4.1
08BWK2F2	12.700	23.20	12.700	28.40	42.6	3.0	8.5	5.4
08BWK2F3	12.700	23.20	12.700	32.00	43.6	1.6	10.0	4.5
12BWK1F1	19.050	34.05		38.10	52.4	1.85	13.46	8.5
16BWK1F	25.400	46.00		57.2	78.5	3.10	15.90	8.1
16BWK1F3	25.400	46.40		50.80	72.6	3.10	15.88	M6
16BWK2F1	25.400	48.00	25.400	58.00	75.9	3.10	18.00	9.0
16BWK2F3	25.400	46.40	25.400	50.80	72.6	3.10	15.88	8.2

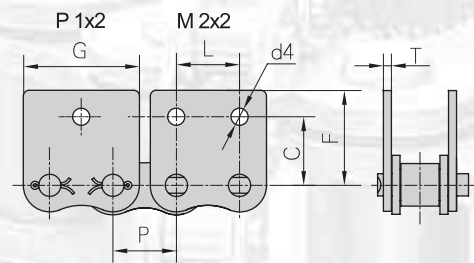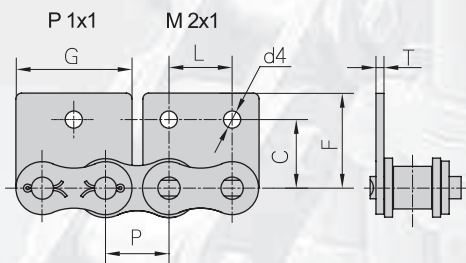


Flexon Chain No.	P	G	L	C	F	T	d4
	mm	mm	mm	mm	mm	mm	mm
*06BWSA2F1	9.525	17.60	9.50	10.1	14.50	1.30	3.3
08BWSK2F1	12.700	23.30	12.70	13.35	18.90	1.60	6.1
32AF5	50.800	93.00	50.80	38.10	56.65	6.40	13.5

* gerade Laschen
* Straight side plates



Winkellaschen-Anbauteile für Rollenketten

Bent attachments for roller chains

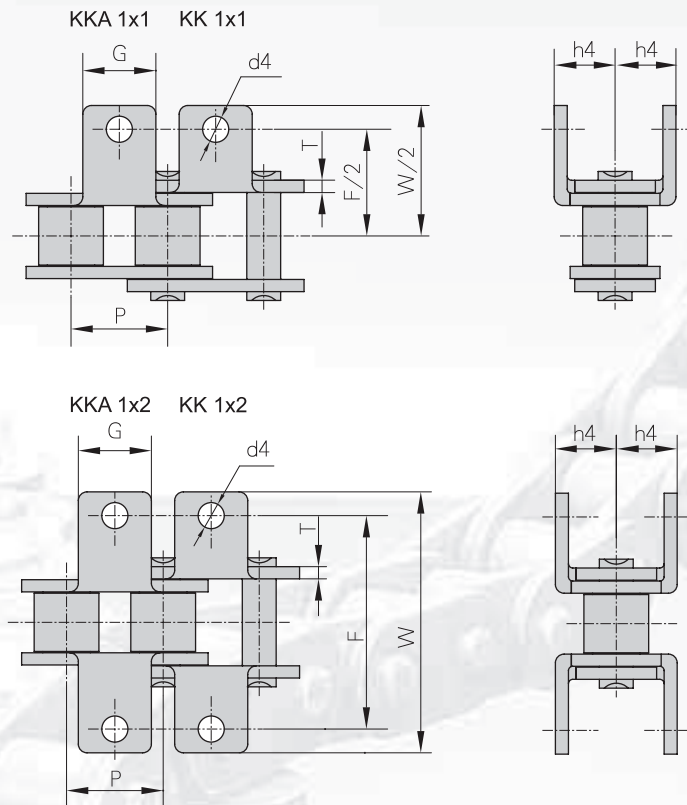


Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	F	W	T	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm
08A	40	12.700	9.5	25.40	35.2	1.50	7.90	3.4
10A	50	15.875	12.7	31.75	46.2	2.03	10.30	5.5
12A	60	19.050	15.9	38.10	55.6	2.42	11.90	5.5
16A	80	25.400	19.1	50.80	64.8	3.25	15.90	6.8
20A	100	31.750	25.4	63.50	87.3	4.00	19.80	9.2
*06B		9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B		12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B		15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B		19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B		25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B		31.750	35.0	63.50	100.5	3.50	19.80	9.0

* gerade Laschen
* Straight side plates



Sonder-Anbauteile für Rollenketten

Special attachments for roller chains

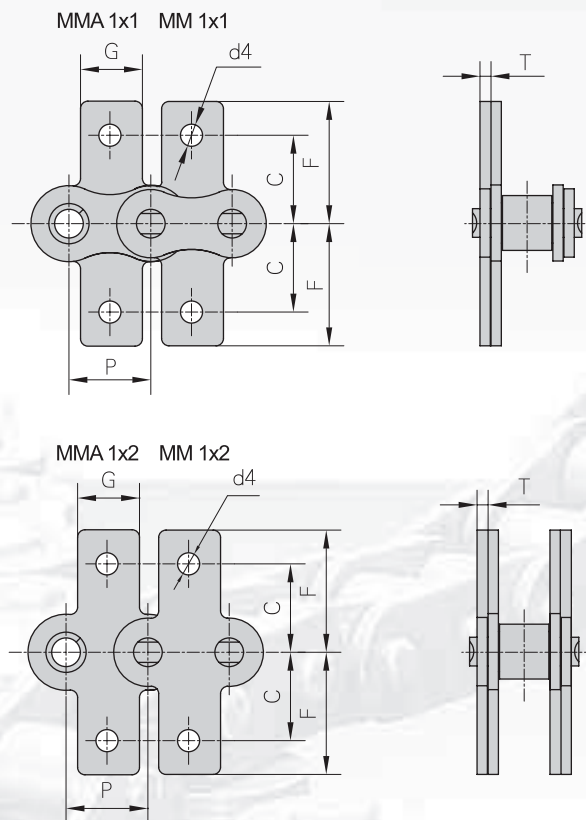


Flexon DIN/ISO Ref.	Flexon ANSI Chain No.	P	G	C	F	T	d4
		mm	mm	mm	mm	mm	mm
08A	40	12.700	9.5	12.70	19.05	1.50	3.4
10A	50	15.875	12.7	15.90	25.25	2.03	5.5
12A	60	19.050	15.9	18.30	29.33	2.42	5.5
16A	80	25.400	19.1	24.60	34.70	3.25	6.8
20A	100	31.750	25.4	31.80	43.30	4.00	9.2
*06B		9.525	8.0	9.52	13.50	1.30	3.5
08B		12.700	9.5	13.35	18.90	1.60	4.3
10B		15.875	14.3	16.50	22.95	1.70	5.3
12B		19.050	16.0	21.45	28.60	1.85	6.4
16B		25.400	19.1	23.15	34.00	3.10	6.4
20B		31.750	35.0	30.50	45.70	3.50	9.0

* gerade Laschen
* Straight side plates





Sonder-Anbauteile für Rollenketten amerikanische Bauart

Special attachments for roller chains acc. to ANSI standard

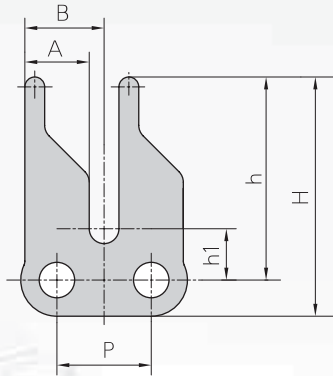


Flexon Chain No.	P	A	B	h ₁	h	H
	mm	mm	mm	mm	mm	mm
06CF2	9.525	6.5	8.0	5.2	20.5	24.15
06CF7	9.525	6.5	8.0	4.1	20.0	24.45

Flexon Chain No.	P	A	B	C	h ₁	h	H
	mm	mm	mm	mm	mm	mm	mm
06CF5	9.525	4.3	2.0	16.9	5.3	16.0	20.0
06CF8	9.525	4.3	2.0	16.9	5.3	20.0	24.00

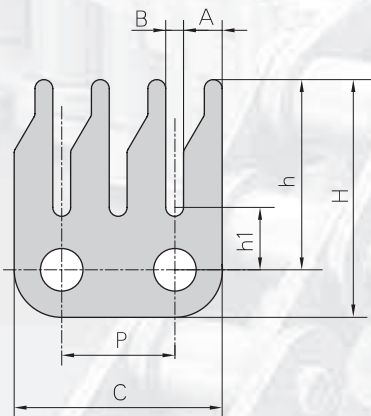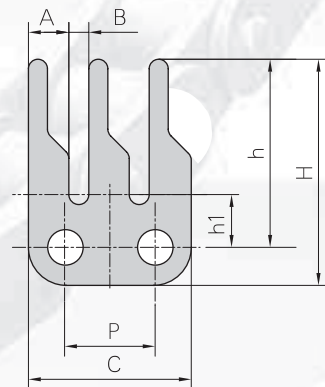

Flexon Chain No.	P	A	B	C	h ₁	h	H
	mm	mm	mm	mm	mm	mm	mm
06CF6	9.525	3.25	1.5	17.5	5.25	16.0	20.0



Flexon Chain No.	P	h	h ₂	H	α
	mm	mm	mm	mm	°
08A-D2-F1	12.7	7.8	10.4	17.4	30°

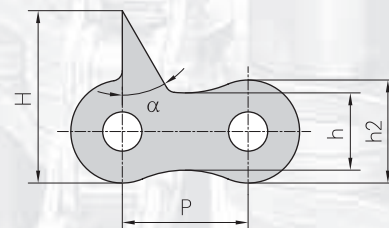




Sonder-Anbauteile für Rollenketten amerikanische Bauart

Special attachments for roller chains acc. to ANSI standard


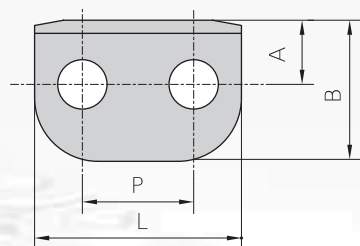



Flexon Chain No.	P	L	A	B	H
	mm	mm	mm	mm	mm
RS40F1	12.7	23.6	7.32	16.1	13.3

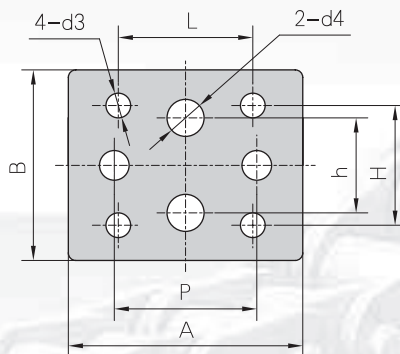

Flexon Chain No.	P	A	B	L	h	H	d3	d4
	mm	mm	mm	mm	mm	mm	mm	mm
08AF7	12.7	31.34	25.48	17.45	12.7	15.88	3.3	4.95

Flexon Chain No.	P	R	H	A
	mm	mm	mm	mm
08AF8	12.7	5.2	16.13	21.34

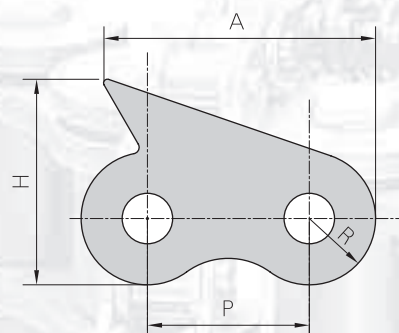


Flexon Chain No.	P	A	B	C	h4
	mm	mm	mm	mm	mm
08AF9-2	12.7	23.0	28.8	16.0	10.0




Sonder-Anbauteile für Rollenketten amerikanische Bauart

Special attachments for roller chains acc. to ANSI standard

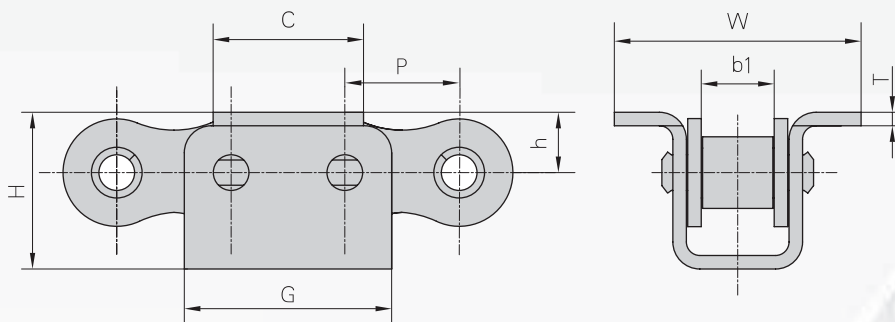

Flexon Chain No.	P	b ₁	C	G	H	h	W	T
	mm	mm	mm	mm	mm	mm	mm	mm
08A-U1F1	12.7	7.85	16.5	24.5	17.4	7.0	27.4	1.6

Buchbindekette Bindery chain

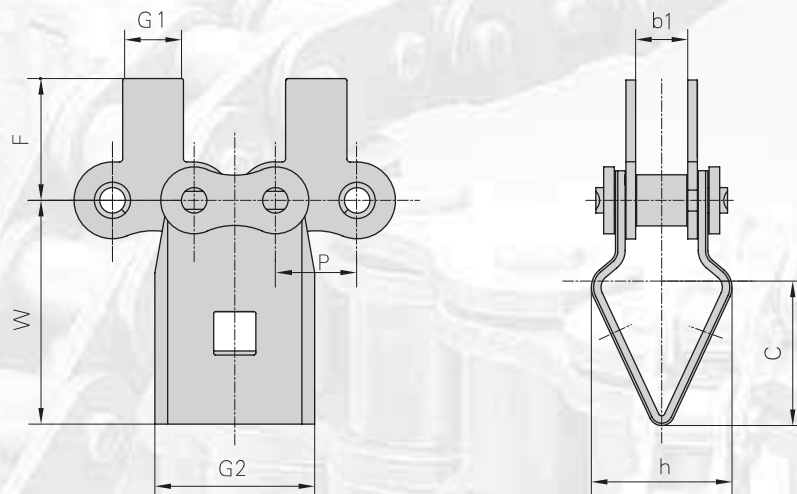


Flexon Chain No.	P	b ₁	G ₁	G ₂	F	W	C	h
	mm	mm	mm	mm	mm	mm	mm	mm
08ASAF1	12.7	7.85	9.5	25.0	19.05	35.0	21.5	22.0





Sonder-Anbauteile für Rollenketten amerikanische Bauart

Special attachments for roller chains acc. to ANSI standard





Flexon Chain No.	P	C	H	α	β
	mm	mm	mm		
428HJF1	12.7	21.5	36.15	90°	18°
428HJF2	12.7	14.5	33.6	90°	34°

Flexon Chain No.	P	h ₂	H	S	T
	mm	mm	mm	mm	mm
10AF2	15.875	13.0	17.0	0.3	2.03

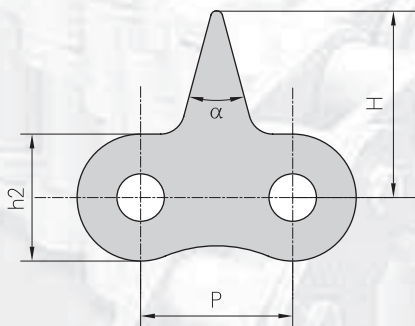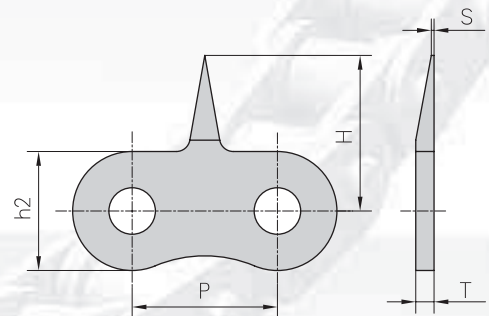

Flexon Chain No.	P	h ₂	H	α
	mm	mm	mm	
08AF10	12.7	10.6	15.6	30°
10AF7	15.875	13.0	15.88	21°

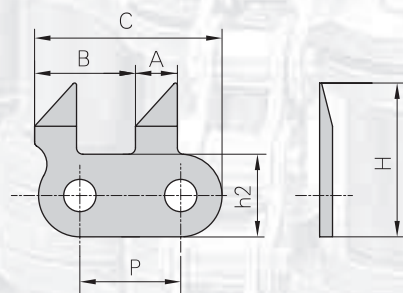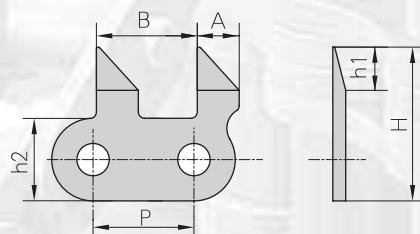


Flexon Chain No.	P	A	B	C	h ₂	H
	mm	mm	mm	mm	mm	mm
10AF8	15.875	6.6	15.875	29.5	13	24.2




Sonder-Anbauteile für Rollenketten amerikanische Bauart


Special attachments for roller chains acc. to ANSI standard





Flexon Chain No.	P	G	H	h2
	mm	mm	mm	mm
12ASA	19.05	10.0	204.0	18.0

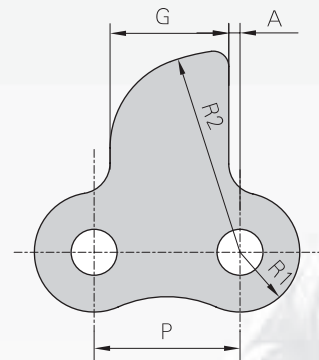

Flexon Chain No.	P	G	A	R1	R2
	mm	mm	mm	mm	mm
12AF7	19.05	15.5	1.47	7.8	26.5

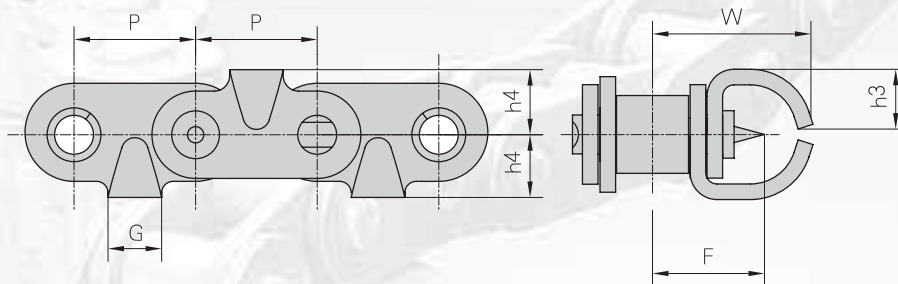

Flexon Chain No.	P	G	F	W	h3	h4
	mm	mm	mm	mm	mm	mm
10AF12	15.875	7.0	14.55	21.2	7.8	8.5




Flexon Chain No.	P	A	G	h1	h4	H	d4
	mm	mm	mm	mm	mm	mm	mm
12AF8	19.05	12.0	37.05	20.69	12.0	26.5	8
12AF17	19.05	20.0	34.65	20.69	11.9	29.48	8





Sonder-Anbauteile für Rollenketten amerikanische Bauart

Special attachments for roller chains acc. to ANSI standard




Flexon Chain No.	P	h	H	L
	mm	mm	mm	mm
C60TS	19.05	14.1	22.3	35.45

Flexon Chain No.	P	h ₂	H	α
	mm	mm	mm	
16AF5	25.4	11.7	34.6	105°




Flexon Chain No.	P	L	h ₁	h	H	d ₄
	mm	mm	mm	mm	mm	mm
16AF6	25.4	47.63	7.92	21.44	34.93	4.98

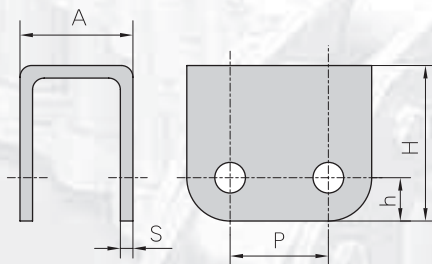


Flexon Chain No.	P	h	H	A	S
	mm	mm	mm	mm	mm
16AF8	25.4	11.2	40.2	29.2	3.1


16AF13



20AF2



20ASK1F1

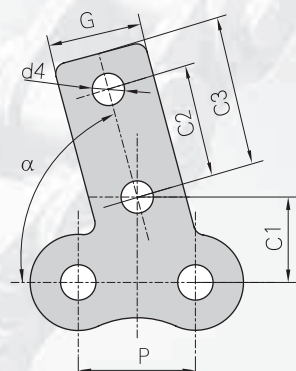

Flexon Chain No.	P	d ₄	R ₁	R ₂
	mm	mm	mm	mm
16AF13	76.2	45.0	11.9	31.0



Flexon Chain No.	P	h	H	α
	mm	mm	mm	
20AF2	31.75	12.5	51.0</	



Sonder-Anbauteile für Rollenketten europäische Bauart



Special attachments for roller chains acc. to DIN standard

Flexon Chain No.	P	h ₂	H	A	B
	mm	mm	mm	mm	mm
05BF1	8.0	7.1	16.0	5.0	12.0

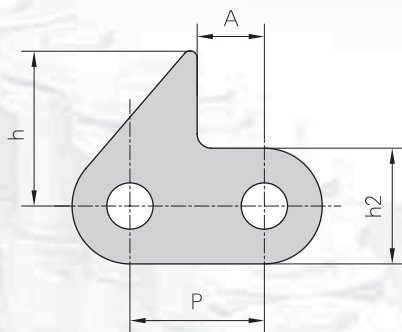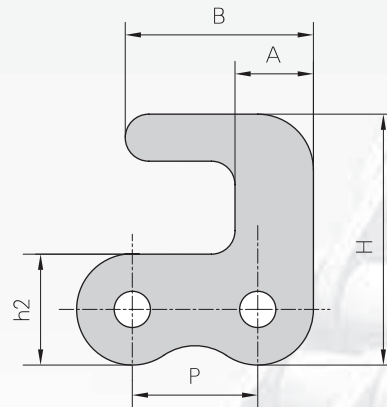


Flexon Chain No.	P	h ₂	h	A
	mm	mm	mm	mm
06BF1	9.525	8.2	11.0	4.76

Flexon Chain No.	P	H	α
	mm	mm	
08BF5	12.7	15.3	30°

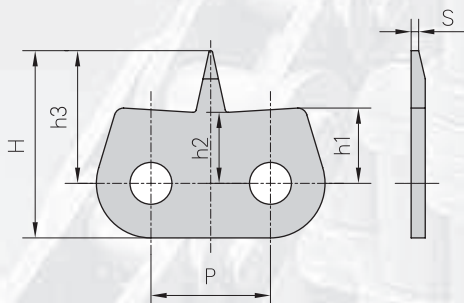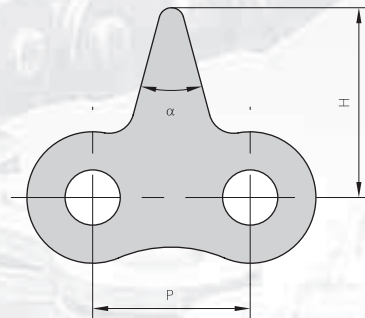

Flexon Chain No.	P	h ₁	h ₂	h ₃	H	s
	mm	mm	mm	mm	mm	mm
08BF11	12.7	8.0	7.8	14.1	19.9	0.8


Flexon Chain No.	P	h ₂	h	α
	mm	mm	mm	
08BSSF11	12.7	10.8	14.6	40°







Sonder-Anbauteile für Rollenketten europäische Bauart

Special attachments for roller chains acc. to DIN standard

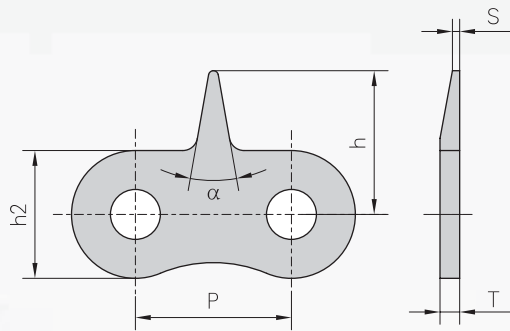


Flexon Chain No.	P	h ₂	h	T	S	α
	mm	mm	mm	mm	mm	
08BF25	12.7	10.6	15.6	1.6		30°
08BF29	12.7	10.6	14.5	1.6	0.8	30°
08BF30	12.7	10.6	14.5	1.6	0.3	30°
08BF35	12.7	10.6	21.5	1.6	0.6	30°

Flexon Chain No.	P	h ₁	h ₂	h	A	α
	mm	mm	mm	mm	mm	
08BF21	12.7	3.0	10.6	15.0	3.0	12°

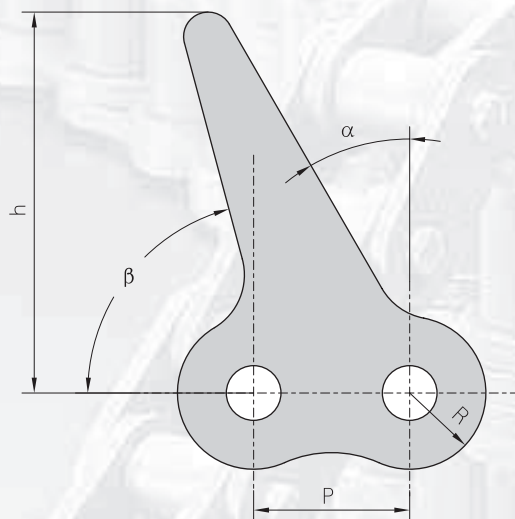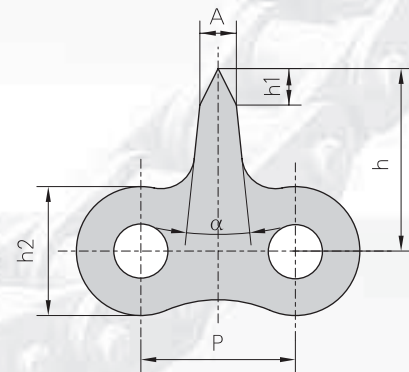

Flexon Chain No.	P	R	h	α	β
	mm	mm	mm		
08BF24	12.7	6.2	31.0	30°	75°


Flexon Chain No.	P	h ₁	h	G
	mm	mm	mm	mm
08BF37	12.7	5.0	11.8	20.0

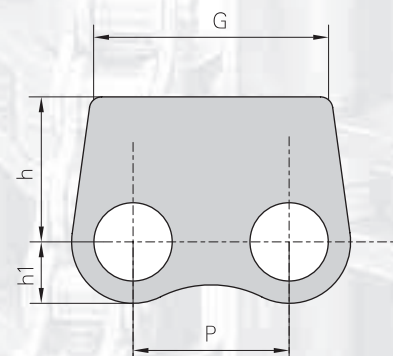




Sonder-Anbauteile für Rollenketten europäische Bauart


Special attachments for roller chains acc. to DIN standard



Flexon Chain No.	P	L	h
	mm	mm	mm
16BF6	25.4	46.0	30.0

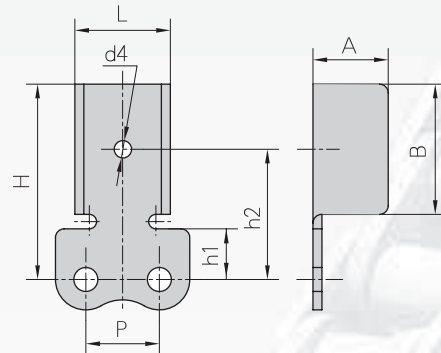


Flexon Chain No.	P	h1	h2	H	A	B	d4	L
	mm	mm	mm	mm	mm	mm	mm	mm
16BF11	25.4	24.5	47.5	64.5	36.0	35.0	6.0	52.7

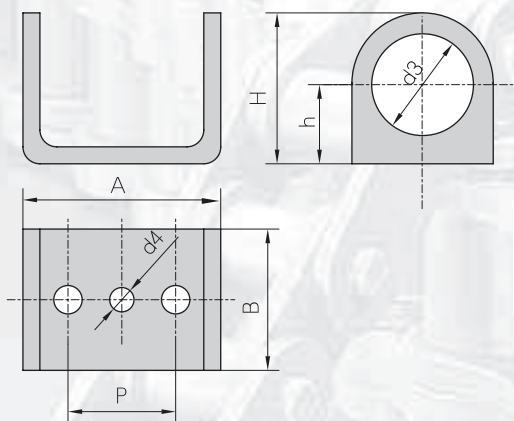

Flexon Chain No.	P	h	H	A	B	d3	d4
	mm	mm	mm	mm	mm	mm	mm
12B-k188	19.05	14.0	26.7	35.0	25.0	18.0	4.3


Flexon Chain No.	P	h1	h	A	B	L
	mm	mm	mm	mm	mm	mm
20BF2	31.75	30.0	70.0	43.0	35.0	65.15

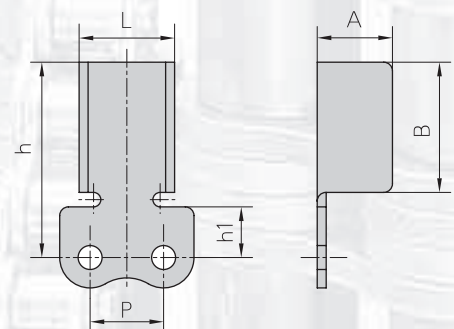




Rollenketten mit Sonder-Anbauteilen

Roller chains with special attachments

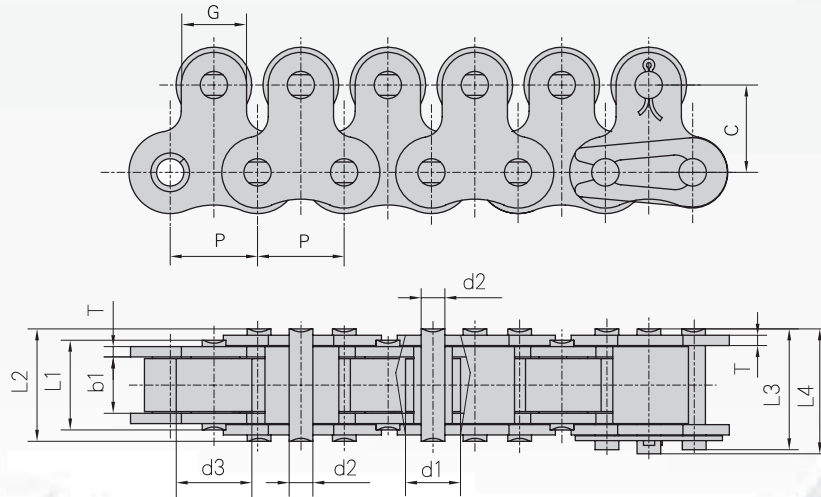

Flexon	Teilung	Rollen ø		Lichte Weite	Bolzen ø	Bolzen- länge				Laschen- abmessungen		min. Bruchkraft	Gewicht per meter
Chain No.	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length				Plate dimension		Ultimate tensile strength	Weight per meter
	P	d1 max	d3 max	b1 min	d2 max	L1 max	L2 max	L3 max	L4 max	G	C	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kg/m
40-1-1LTR	12.700	7.95	11.0	7.85	3.96	13.5	16.6	17.8	18.8	9.5	12.7	14.1/3250	1.44
50-1-1LTR	15.875	10.16	15.0	9.40	5.08	16.5	20.7	22.2	23.3	12.7	15.9	22.2/5405	2.30
60-1-1LTR	19.050	11.91	18.0	12.57	5.94	21.0	25.9	27.7	28.3	15.9	18.3	31.8/7227	3.40
80-1-1LTR	25.400	15.88	24.0	15.75	7.92	26.2	32.7	35.0	36.5	19.1	24.6	56.7/12886	5.90
100-1-1LTR	31.750	19.05	30.0	18.90	9.53	32.3	40.4	44.7	44.7	25.4	31.8	88.5/20114	8.90

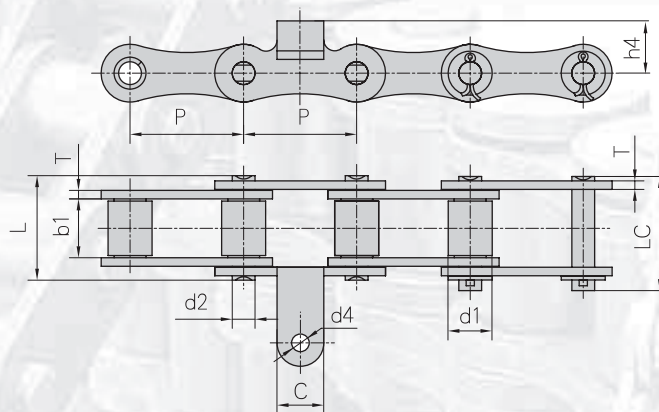

Flexon	Teilung	Rollen ø	Lichte Weite	Bolzen ø	Bolzen- länge		Laschen- abmessungen			min. Bruchkraft	Durchschn. Bruchlast	Gewicht per meter
Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate dimension			Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	C	h4	d4	Q min	Q0 min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
41PF	41.3	16.0	21.1	8.28	38.5	42.2	17.0	19.0	6.4	48.0/10906	52.8	2.57