

GUIDE PER CATENA A RULLI SEMPLICE TIPO 1T

Lunghezze standard 2 METRI
(a richiesta lunghezze maggiori)

Materiale: **PE-UHMW Polietilene ad alto peso molecolare (p.m. oltre 1.000.000)**

Colore: **verde**

Peso specifico: **g/cm³ 0,945**

Coefficiente attrito dinamico: **0.2 (P = 0.05 N/mm² - V = 0.6 m/s - T = 40°C)**

Temperatura d'impiego: **-70°C +65°C**

Dilatazione termica lineare: **mm 2 ogni 10°C a partire dalla temperatura ambiente di 20°C**

GUIDE FOR SIMPLE ROLLER CHAIN - 1T-PROFILE

Standard Length 2 METRES
(Other lengths on request)

Material: **PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)**


Color: **green**

Specific weight: **0.945 g/cm³**

Dynamic friction coefficient: **0.2 (P = 0.05N/mm² - V = 0.6 m/s - T = 40°C)**

Operating temperature: **-70°C +65°C**

Linear thermal expansion: **2 mm every 10°C starting from a room temperature of 20°C**



articolo item	tipo catena chain type	cod. ISO ISO code	B	H	b	h
S1T010URG	3/8" x 7/32"	06-B1	15	10	5,4	1,5
S1T110URG	1/2" x 5/16"	08-B1	20	10	7,4	2,2
S1T115URG	1/2" x 5/16"	08-B1	20	15	7,4	2,2
S1T120URG	1/2" x 5/16"	08-B1	20	20	7,4	2,2
S1T210URG	5/8" x 3/8"	10-B1	20	10	9,2	2,6
S1T215URG	5/8" x 3/8"	10-B1	20	15	9,2	2,6
S1T220URG	5/8" x 3/8"	10-B1	20	20	9,2	2,6
S1T310URG	3/4" x 7/16"	12-B1	25	10	11,3	2,4
S1T315URG	3/4" x 7/16"	12-B1	25	15	11,3	2,4
S1T320URG	3/4" x 7/16"	12-B1	25	20	11,3	2,4
S1T415URG	1" x 17,02"	16-B1	40	15	16,5	3,5
S1T420URG	1" x 17,02"	16-B1	40	20	16,5	3,5
S1T515URG	1"1/4 x 3/4"	20-B1	45	15	19	4,3
S1T520URG	1"1/4 x 3/4"	20-B1	45	20	19	4,3
S1T615URG	1"1/2 x 1"	24-B1	60	15	24,6	5,6
S1T620URG	1"1/2 x 1"	24-B1	60	20	24,6	5,6
S1T720URG	1"3/4 x 1"1/4	28-B1	75	20	30	6,9
S1T820URG	2" x 1"1/4	32-B1	80	20	30	7,8

GUIDE PER CATENA A RULLI DOPPIA TIPO 2T

Lunghezze standard 2 METRI
 (a richiesta lunghezze maggiori)

Materiale: **PE-UHMW Polietilene ad alto peso molecolare (p.m. oltre 1.000.000)**

Colore: **verde**

Peso specifico: **g/cm³ 0,945**

Coefficiente attrito dinamico: **0.2 (P = 0.05 N/mm² - V = 0.6 m/s - T = 40°C)**

Temperatura d'impiego: **-70°C +65°C**

Dilatazione termica lineare: **mm 2 ogni 10°C a partire dalla temperatura ambiente di 20°C**

GUIDE FOR DOUBLE ROLLER CHAIN - 2T-PROFILE

Standard Length 2 METRES
 (Other lengths on request)

Material: **PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)**


Color: **green**

Specific weight: **0.945 g/cm³**

Dynamic friction coefficient: **0.2 (P = 0.05N/mm² - V = 0.6 m/s - T = 40°C)**

Operating temperature: **-70°C +65°C**

Linear thermal expansion: **2 mm every 10°C starting from a room temperature of 20°C**



articolo item	tipo catena chain type	cod. ISO ISO code	B	H	b	h	P
S2T010URG	3/8" x 7/32"	06-B2	25	10	5,4	1,5	15,8
S2T110URG	1/2" x 5/16"	08-B2	35	10	7,4	2,2	21,4
S2T115URG	1/2" x 5/16"	08-B2	35	15	7,4	2,2	21,4
S2T120URG	1/2" x 5/16"	08-B2	35	20	7,4	2,2	21,4
S2T210URG	5/8" x 3/8"	10-B2	40	10	9,2	2,6	25,8
S2T215URG	5/8" x 3/8"	10-B2	40	15	9,2	2,6	25,8
S2T220URG	5/8" x 3/8"	10-B2	40	20	9,2	2,6	25,8
S2T315URG	3/4" x 7/16"	12-B2	45	15	11,3	2,4	30,8
S2T320URG	3/4" x 7/16"	12-B2	45	20	11,3	2,4	30,8
S2T415URG	1" x 17,02"	16-B2	65	15	16,5	3,5	48,4
S2T420URG	1" x 17,02"	16-B2	65	20	16,5	3,5	48,4
S2T515URG	1"1/4 x 3/4"	20-B2	70	15	19	4,3	54,5
S2T520URG	1"1/4 x 3/4"	20-B2	70	20	19	4,3	54,5
S2T615URG	1"1/2 x 1"	24-B2	88	15	24,6	5,6	73
S2T620URG	1"1/2 x 1"	24-B2	88	20	24,6	5,6	73
S2T720URG	1"3/4 x 1"1/4	28-B2	105	25	30	6,9	89,6
S2T820URG	2" x 1"1/4	32-B2	105	30	30	7,8	88,7

GUIDE PER CATENA A RULLI TRIPLA TIPO 3T

Lunghezze standard 2 METRI
(a richiesta lunghezze maggiori)

Materiale: **PE-UHMW Polietilene ad alto peso molecolare (p.m. oltre 1.000.000)**

Colore: **verde**

Peso specifico: **g/cm³ 0,945**

Coefficiente attrito dinamico: **0.2 (P = 0.05 N/mm² - V = 0.6 m/s - T = 40°C)**

Temperatura d'impiego: **-70°C +65°C**

Dilatazione termica lineare: **mm 2 ogni 10°C a partire dalla temperatura ambiente di 20°C**

GUIDE FOR TRIPLEX ROLLER CHAIN - 3T-PROFILE

Standard Length 2 METRES
(Other lengths on request)

Material: **PE-UHMW High Molecular Weight Polyethylene (over 1.000.0000 p.m.)**


Color: **green**

Specific weight: **0.945 g/cm³**

Dynamic friction coefficient: **0.2 (P = 0.05N/mm² - V = 0.6 m/s - T = 40°C)**

Operating temperature: **-70°C +65°C**

Linear thermal expansion: **2 mm every 10°C starting from a room temperature of 20°C**

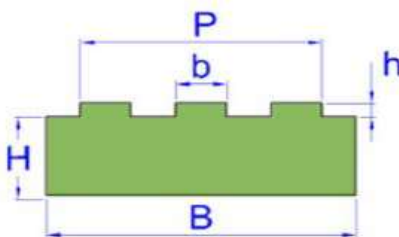

articolo item	tipo catena chain type	cod. ISO ISO code	B	H	b	h	P
S3T010URG	3/8" x 7/32"	06-B3	35	10	5,4	1,5	25,9
S3T110URG	1/2" x 5/16"	08-B3	45	10	7,4	2,2	35,2
S3T115URG	1/2" x 5/16"	08-B3	45	15	7,4	2,2	35,2
S3T120URG	1/2" x 5/16"	08-B3	45	20	7,4	2,2	35,2
S3T210URG	5/8" x 3/8"	10-B3	55	10	9,2	2,6	42,4
S3T215URG	5/8" x 3/8"	10-B3	55	15	9,2	2,6	42,4
S3T220URG	5/8" x 3/8"	10-B3	55	20	9,2	2,6	42,4
S3T315URG	3/4" x 7/16"	12-B3	60	15	11,3	2,4	50,2
S3T320URG	3/4" x 7/16"	12-B3	60	20	11,3	2,4	50,2
S3T415URG	1" x 17,02"	16-B3	95	15	16,5	3,5	80,3
S3T420URG	1" x 17,02"	16-B3	95	20	16,5	3,5	80,3